


PEX-B/AL/PEX-B THREE LAYER PIPE

COMPLY WITH BS EN ISO 21003-1:2008
BSEN ISO 21003-2:2008+A1:2011
AS/NZS 4020:2005
SS 375:2015



MULTILAYER PIPES

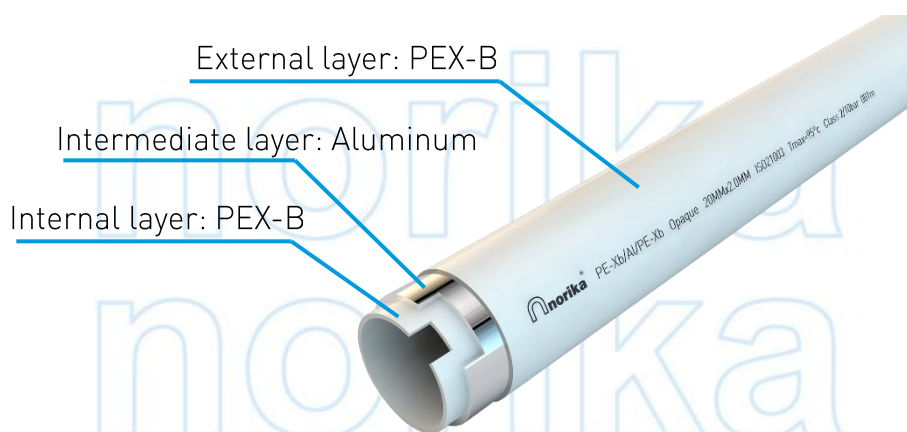

COMPONENTS	
Material Name	Advantages
PEX-B (Cross-linked Polyethylene)	Light weight, corrosion resistance, easy installation, and low cost.
Aluminum	Enhances pipe compressive and impact resistance, ensuring stability and effective oxygen isolation. Easy to cut, bendable, and non-rebounding.

STANDARD SPECIFICATION	
Working Pressure	10 Bar
Working Temperature	0 ~ 70°C
Applications	Hot and cold potable water system.
**Attention During Installation	Exclusively indoor installation only. (While it offers some UV resistance, adding a protective cover is advisable for enhanced protection.)

PEX-B/AL/PEX-B THREE LAYER PIPE


COMPLY WITH BS EN ISO 21003-1:2008
BS EN ISO 21003-2:2008+A1:2011
AS/NZS 4020:2005
SS 375:2015



STRAIGHT TUBE
SKU: PIPPEXL016~075



COILING TUBE
SKU: PIPPEX016~032

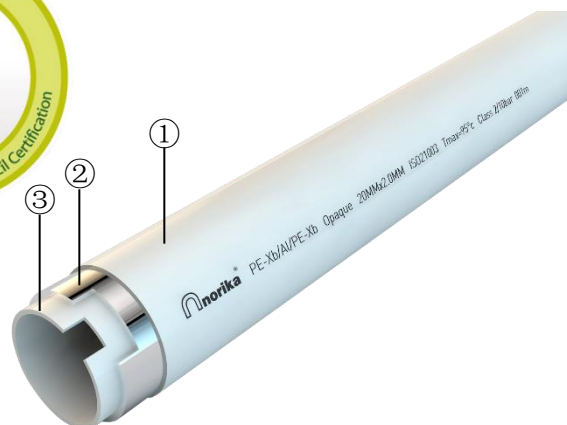

****Exclusively indoor installation only.**

STANDARD SPECIFICATION		COMPONENT PARTS		
Working Pressure	10 Bar	ITEM	PARTS	MATERIAL
Working Temperature	0 ~ 70°C	1	Outside layer	PEX-B
Applications	Hot and cold potable water system.	2	Middle layer	Aluminum
		3	Inside layer	PEX-B

DIMENSIONS

SKU	Outside Diameter (mm)	Inside Diameter (mm)	Thickness (mm)	Tolerance Of Pipe Thickness (mm)	Length (mm)	WEIGHT (kg/m)
PIPPEXL016	16	12	2.0	2.00~2.25	5800	0.121
PIPPEXL020	20	16	2.0	2.00~2.30	5800	0.166
PIPPEXL025	25	20	2.5	2.40~2.70	5800	0.235
PIPPEXL032	32	26	3.0	2.90~3.25	5800	1.040
PIPPEXL040	40	32	4.0	4.00~4.60	5800	0.567
PIPPEXL050	50	41	4.5	4.50~5.20	5800	0.820
PIPPEXL063	63	51	6.0	6.00~6.80	5800	1.334
PIPPEXL075	75	60	7.5	7.50~8.50	5800	1.893

DIMENSIONS

SKU	Outside Diameter (mm)	Inside Diameter (mm)	Thickness (mm)	Tolerance Of Pipe Thickness (mm)	WEIGHT (kg/m)	M/CTN
PIPPEX016	16	12	2.0	2.00~2.25	0.121	200M
PIPPEX020	20	16	2.0	2.00~2.30	0.166	200M
PIPPEX025	25	20	2.5	2.40~2.70	0.235	100M
PIPPEX032	32	26	3.0	2.90~3.25	1.040	50M