

NORIKA STAINLESS STEEL 304 THREADED FITTINGS





TEST CERTIFICATE POTABLE WATER FITTINGS SCHEME

Certificate Number : TC-J0307
Issue No : 03

This Certificate is awarded to the following product(s) which has / have complied with the requirements of the listed standard(s) in accordance with Stipulation of Standards and Requirements for Water Fittings for Use in Potable Water Service Installations.

Client : **Liang Chew Hardware Pte Ltd**
133 Kitchener Road
Singapore 208517

Product : Stainless Steel Threaded Fittings

Brand / Model : Norika / SS304 Threaded Fittings

Detail : Size (mm): 15 to 100

Test Standard(s) : BS EN 1254-2: 1998, AS/NZS 4020: 2018, SS 375: 2015


Test Report(s) : FB8500265106/2, 2221548/01-OYC,
2221548/03-CPC

A sample of the product submitted was tested and found to comply with the test requirements of the above standard(s).

Date of Original Issue : 29 March 2022

Date of Last Revision : 19 March 2026

Date of Expiry : 28 March 2028



Head, Certification
Singapore Test Lab Pte Ltd

This Certificate is part of a full report and should be read in conjunction with it. This Certificate remains the property of Singapore Test Lab Pte Ltd and shall be returned upon request. The use of this Certificate is subjected to the Terms and Conditions of Singapore Test Lab Pte Ltd. The manufacturer is solely responsible for the compliance of any product that has the same designation as the product type tested.




Singapore Test Lab Pte Ltd certifies according to ISO / IEC 17065



STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

45° ELBOW

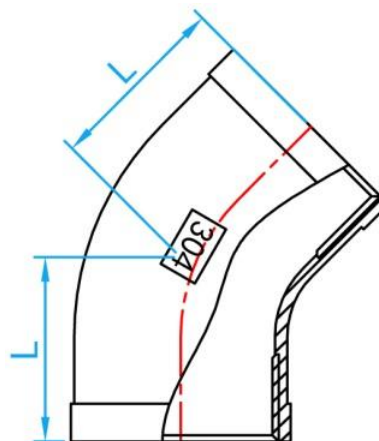

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304E45015	SS316E45015	1/2"	19.5	0.060	400
SS304E45020	SS316E45020	3/4"	23.4	0.088	250
SS304E45025	SS316E45025	1"	28.0	0.130	120
SS304E45035	SS316E45035	1 1/4"	33.2	0.222	50
SS304E45042	SS316E45042	1 1/2"	36.7	0.282	50
SS304E45050	SS316E45050	2"	44.6	0.442	40
SS304E45065	SS316E45065	2 1/2"	54.0	0.740	25
SS304E45080	SS316E45080	3"	61.8	1.110	10
SS304E45100	SS316E45100	4"	61.0	1.850	5


Note: AISI316L material available upon request.

* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

90° ELBOW

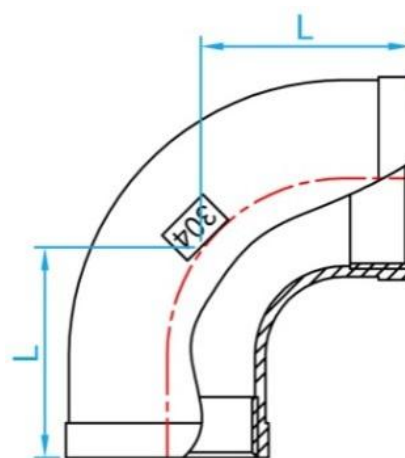

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		SIZE BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304E90015	SS316E90015	½"	26	0.0739	300
SS304E90020	SS316E90020	¾"	32	0.1092	200
SS304E90025	SS316E90025	1"	35	0.1705	100
SS304E90035	SS316E90035	1¼"	34.7	0.2806	50
SS304E90042	SS316E90042	1½"	47	0.3555	50
SS304E90050	SS316E90050	2"	58	0.5266	32
SS304E90065	SS316E90065	2½"	67	0.9400	20
SS304E90080	SS316E90080	3"	75	1.3400	10
SS304E90100	SS316E90100	4"	95.5	2.3000	5




Note: AISI316L material available upon request.

* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

STRAIGHT ELBOW [MXF]

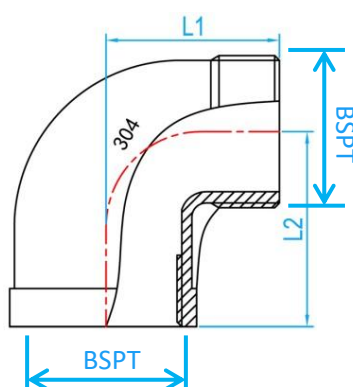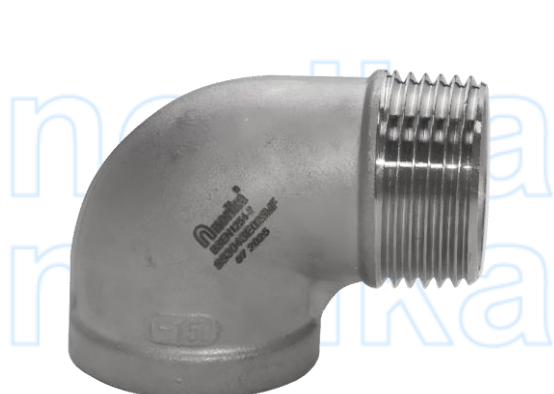

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L1 (mm)	L2 (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L					
SS304SE015MF	SS316SE015MF	½"	37	29	0.068	350
SS304SE020MF	SS316SE020MF	¾"	46	31	0.098	200
SS304SE025MF	SS316SE025MF	1"	47	36	0.160	100
SS304SE035MF	SS316SE035MF	1¼"	54	44	0.260	60
SS304SE042MF	SS316SE042MF	1½"	58	49	0.330	50
SS304SE050MF	SS316SE050MF	2"	69	56	0.532	30


Note: AISI316L material available upon request.

* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

EQUAL SOCKET

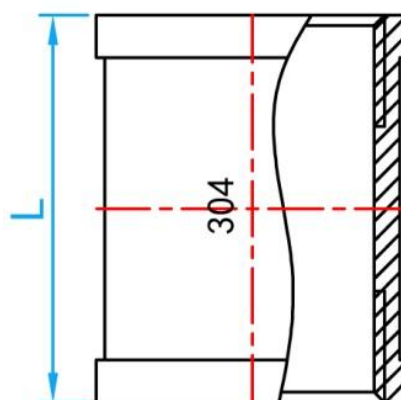

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304ES015	SS316ES015	½"	35	0.056	500
SS304ES020	SS316ES020	¾"	40	0.075	300
SS304ES025	SS316ES025	1"	44	0.114	200
SS304ES035	SS316ES035	1¼"	49	0.182	100
SS304ES042	SS316ES042	1½"	54	0.215	60
SS304ES050	SS316ES050	2"	62	0.356	50
SS304ES065	SS316ES065	2½"	71	0.534	26
SS304ES080	SS316ES080	3"	76	0.725	16
SS304ES100	SS316ES100	4"	86	1.250	12



Note: AISI316L material available upon request.

* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

EQUAL SOCKET M/F

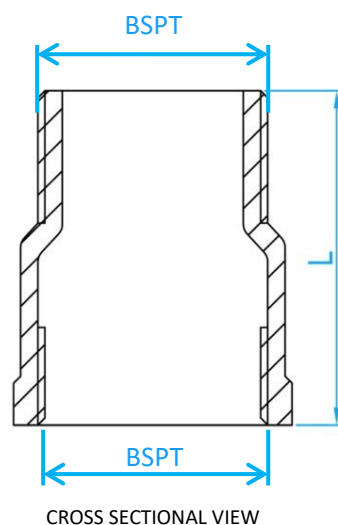

DIMENSIONS


SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304ES015MF	SS316ES015MF	½"BSPT	40	0.053	500
SS304ES020MF	SS316ES020MF	¾"BSPT	45	0.076	300
SS304ES025MF	SS316ES025MF	1"BSPT	48	0.118	200
SS304ES035MF	SS316ES035MF	1¼"BSPT	50	0.160	100
SS304ES042MF	SS316ES042MF	1½"BSPT	52	0.204	80
SS304ES050MF	SS316ES050MF	2"BSPT	61	0.307	50

Note: AISI316L material available upon request.


* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304 THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018



REDUCING SOCKET

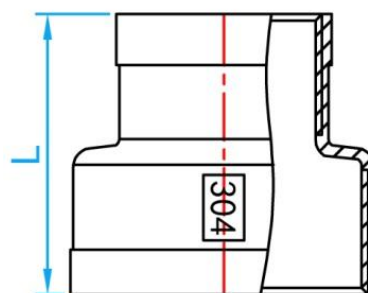

CROSS SECTIONAL VIEW

DIMENSIONS


SKU		BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304RS02015	SS316RS02015	$\frac{3}{4}'' \times \frac{1}{2}''$	37	0.0710	300
SS304RS02515	SS316RS02515	$1'' \times \frac{1}{2}''$	41	0.1130	200
SS304RS02520	SS316RS02520	$1'' \times \frac{3}{4}''$	42	0.1125	200
SS304RS03515	SS316RS03515	$1\frac{1}{4}'' \times \frac{1}{2}''$	44	0.1612	150
SS304RS03520	SS316RS03520	$1\frac{1}{4}'' \times \frac{3}{4}''$	44	0.1700	150
SS304RS03525	SS316RS03525	$1\frac{1}{4}'' \times 1''$	45	0.1695	120
SS304RS04215	SS316RS04215	$1\frac{1}{2}'' \times \frac{1}{2}''$	42	0.1892	100
SS304RS04220	SS316RS04220	$1\frac{1}{2}'' \times \frac{3}{4}''$	47	0.2188	100
SS304RS04225	SS316RS04225	$1\frac{1}{2}'' \times 1''$	47	0.2283	100
SS304RS04235	SS316RS04235	$1\frac{1}{2}'' \times 1\frac{1}{4}''$	49	0.2358	80
SS304RS05015	SS316RS05015	$2'' \times \frac{1}{2}''$	45	0.2955	80
SS304RS05020	SS316RS05020	$2'' \times \frac{3}{4}''$	47	0.2904	80
SS304RS05025	SS316RS05025	$2'' \times 1''$	46	0.2885	80
SS304RS05035	SS316RS05035	$2'' \times 1\frac{1}{4}''$	49	0.3060	80
SS304RS05042	SS316RS05042	$2'' \times 1\frac{1}{2}''$	50	0.3266	80

Note: AISI316L material available upon request.


* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304 THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018



REDUCING SOCKET

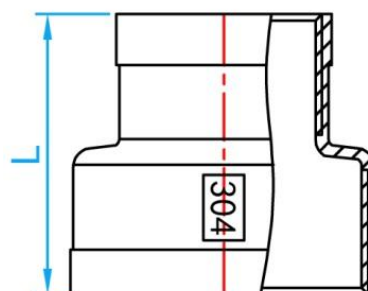

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304RS06525	SS316RS06525	2 1/2" × 1"	62	0.450	50
SS304RS06535	SS316RS06535	2 1/2" × 1 1/4"	62	0.490	50
SS304RS06542	SS316RS06542	2 1/2" × 1 1/2"	62	0.450	50
SS304RS06550	SS316RS06550	2 1/2" × 2"	62	0.450	50
SS304RS08025	SS316RS08025	3" × 1"	66	0.570	20
SS304RS08035	SS316RS08035	3" × 1 1/4"	66	0.620	20
SS304RS08042	SS316RS08042	3" × 1 1/2"	66	0.620	20
SS304RS08050	SS316RS08050	3" × 2"	66	0.630	20
SS304RS08065	SS316RS08065	3" × 2 1/2"	66	0.660	20
SS304RS10025	SS316RS10025	4" × 1"	78	0.990	10
SS304RS10050	SS316RS10050	4" × 2"	80	1.040	10




Note: AISI316L material available upon request.

* The tolerance for weight is ±5%

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

REDUCING BUSH

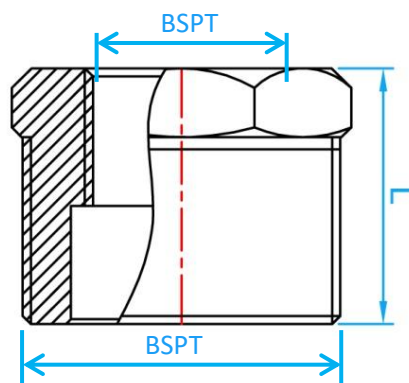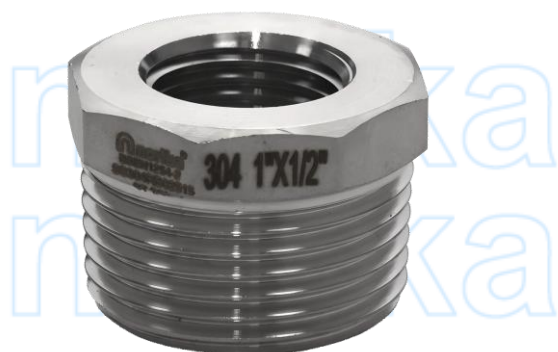

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304RB01506	SS316RB01506	$\frac{1}{2}'' \times \frac{1}{8}''$	22	0.0360	1200
SS304RB01508	SS316RB01508	$\frac{1}{2}'' \times \frac{1}{4}''$	22	0.0347	1200
SS304RB01510	SS316RB01510	$\frac{1}{2}'' \times \frac{3}{8}''$	22	0.0341	1200
SS304RB02015	SS316RB02015	$\frac{3}{4}'' \times \frac{1}{2}''$	26	0.0482	600
SS304RB02515	SS316RB02515	$1'' \times \frac{1}{2}''$	27	0.0800	300
SS304RB02520	SS316RB02520	$1'' \times \frac{3}{4}''$	27	0.0702	400
SS304RB03515	SS316RB03515	$1\frac{1}{4}'' \times \frac{1}{2}''$	30	0.1285	200
SS304RB03520	SS316RB03520	$1\frac{1}{4}'' \times \frac{3}{4}''$	30	0.1388	200
SS304RB03525	SS316RB03525	$1\frac{1}{4}'' \times 1''$	30	0.1088	200
SS304RB04215	SS316RB04215	$1\frac{1}{2}'' \times \frac{1}{2}''$	31	0.1726	150
SS304RB04220	SS316RB04220	$1\frac{1}{2}'' \times \frac{3}{4}''$	31	0.1754	150
SS304RB04225	SS316RB04225	$1\frac{1}{2}'' \times 1''$	31	0.1749	150
SS304RB04235	SS316RB04235	$1\frac{1}{2}'' \times 1\frac{1}{4}''$	31	0.1203	150
SS304RB05015	SS316RB05015	$2'' \times \frac{1}{2}''$	33	0.2455	96
SS304RB05020	SS316RB05020	$2'' \times \frac{3}{4}''$	33	0.2530	96
SS304RB05025	SS316RB05025	$2'' \times 1''$	33	0.2462	96
SS304RB05035	SS316RB05035	$2'' \times 1\frac{1}{4}''$	33	0.2610	96
SS304RB05042	SS316RB05042	$2'' \times 1\frac{1}{2}''$	33	0.2276	96

Note: AISI316L material available upon request.




* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304/316L

THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

REDUCING BUSH

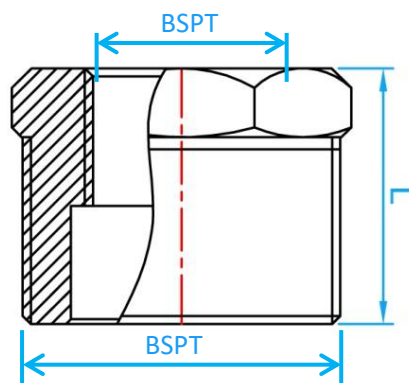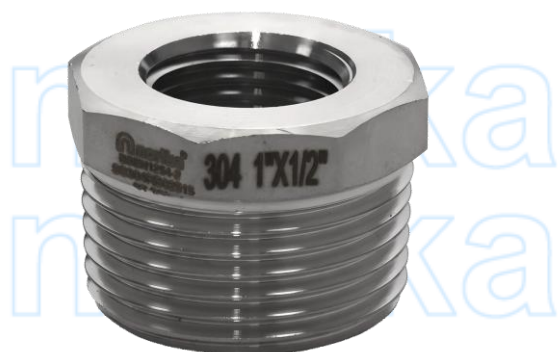

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304RB06515	SS316LRB06515	2½" × ½"			
SS304RB06520	SS316LRB06520	2½" × ¾"			
SS304RB06525	SS316LRB06525	2½" × 1"	41	0.4917	60
SS304RB06535	SS316LRB06535	2½" × 1¼"	39	0.6000	60
SS304RB06542	SS316LRB06542	2½" × 1½"	39	0.5670	60
SS304RB06550	SS316LRB06550	2½" × 2"	39	0.4377	60
SS304RB08015	SS316LRB08015	3" × ½"	33	0.482	30
SS304RB08020	SS316LRB08020	3" × ¾"	33	0.472	30
SS304RB08025	SS316LRB08025	3" × 1"	33	0.465	30
SS304RB08042	SS316LRB08042	3" × 1½"	44	0.8610	30
SS304RB08050	SS316LRB08050	3" × 2"	44	0.5750	30
SS304RB08065	SS316LRB08065	3" × 2½"	44	0.5493	30
SS304RB10025	SS316LRB10025	4" × 1"	48	0.088	18
SS304RB10035	SS316LRB10035	4" × 1¼"	48	0.088	18
SS304RB10042	SS316LRB10042	4" × 1½"	50	1.6230	18
SS304RB10050	SS316LRB10050	4" × 2"	48	1.0330	18
SS304RB10065	SS316LRB10065	4" × 2½"	48	1.0180	18
SS304RB10080	SS316LRB10080	4" × 3"	48	1.0950	18


* The tolerance for weight is ±5%

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018



EQUAL NIPPLE

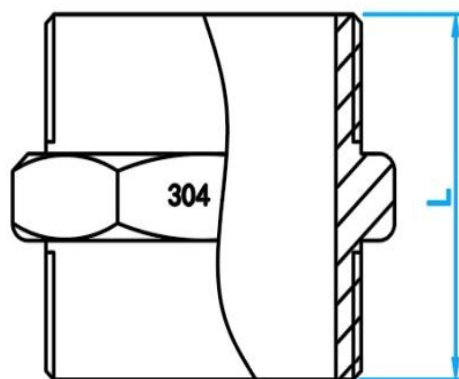

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304EN015	SS316EN015	½"BSPT	38.0	0.045	500
SS304EN020	SS316EN020	¾"BSPT	38.0	0.065	300
SS304EN025	SS316EN025	1"BSPT	44.0	0.100	200
SS304EN035	SS316EN035	1¼"BSPT	50.0	0.155	100
SS304EN042	SS316EN042	1½"BSPT	54.0	0.180	100
SS304EN050	SS316EN050	2"BSPT	58.0	0.285	50
SS304EN065	SS316EN065	2½"BSPT	62.0	0.530	30
SS304EN080	SS316EN080	3"BSPT	66.0	0.600	22
SS304EN100	SS316EN100	4"BSPT	74.0	0.955	12


Note: AISI316L material available upon request.

* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

REDUCING NIPPLE

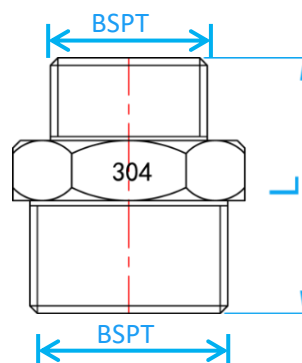

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304RN01506	SS316RN01506	$\frac{1}{2}'' \times \frac{1}{4}''$	35.75	0.030	500
SS304RN01510	SS316RN01510	$\frac{1}{2}'' \times \frac{3}{8}''$	36.30	0.040	500
SS304RN02015	SS316RN02015	$\frac{3}{4}'' \times \frac{1}{2}''$	42.00	0.086	350
SS304RN02520	SS316RN02520	$1'' \times \frac{3}{4}''$	47.00	0.210	200
SS304RN03515	SS316RN03515	$1 \frac{1}{4}'' \times \frac{1}{2}''$	49.77	0.166	150
SS304RN03520	SS316RN03520	$1 \frac{1}{4}'' \times \frac{3}{4}''$	50.50	0.167	150
SS304RN03525	SS316RN03525	$1 \frac{1}{4}'' \times 1''$	51.00	0.258	120
SS304RN04215	SS316RN04215	$1 \frac{1}{2}'' \times \frac{1}{2}''$	49.00	0.280	100
SS304RN04220	SS316RN04220	$1 \frac{1}{2}'' \times \frac{3}{4}''$	51.00	0.207	120
SS304RN04225	SS316RN04225	$1 \frac{1}{2}'' \times 1''$	51.00	0.368	80
SS304RN04235	SS316RN04235	$1 \frac{1}{2}'' \times 1 \frac{1}{4}''$	53.90	0.188	100
SS304RN05025	SS316RN05025	$2'' \times 1''$	56.00	0.390	80
SS304RN05035	SS316RN05035	$2'' \times 1 \frac{1}{4}''$	58.00	0.390	80
SS304RN05042	SS316RN05042	$2'' \times 1 \frac{1}{2}''$	57.20	0.240	80



Note: AISI316L material available upon request.

* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

EQUAL TEE

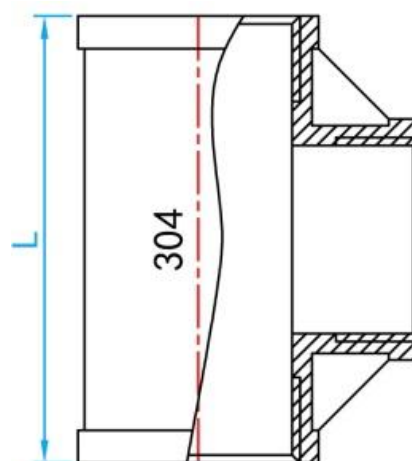

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304ET015	SS316ET015	½"	55	0.0850	250
SS304ET020	SS316ET020	¾"	65	0.1416	130
SS304ET025	SS316ET025	1"	73.5	0.2259	75
SS304ET035	SS316ET035	1¼"	86	0.3050	50
SS304ET042	SS316ET042	1½"	95	0.4500	40
SS304ET050	SS316ET050	2"	102	0.6370	24
SS304ET065	SS316ET065	2½"	137	1.090	10
SS304ET080	SS316ET080	3"	155	1.745	8
SS304ET100	SS3164ET100	½"	184	2.9000	4


Note: AISI316L material available upon request.

* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304 THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

REDUCING TEE

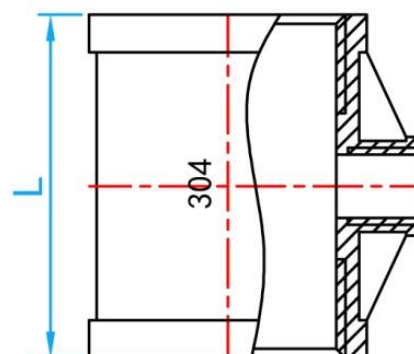

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304RT01508*	SS316RT01508*	$\frac{1}{2}'' \times \frac{1}{4}''$	43.0	0.0749	100
SS304RT01510*	SS316RT01510*	$\frac{1}{2}'' \times \frac{3}{8}''$	48.5	0.0808	100
SS304RT02008	SS316RT02008	$\frac{3}{4}'' \times \frac{1}{4}''$	48.2	0.0900	100
SS304RT02015	SS316RT02015	$\frac{3}{4}'' \times \frac{1}{2}''$	59.0	0.1279	150
SS304RT02515	SS316RT02515	$1'' \times \frac{1}{2}''$	65.0	0.1888	100
SS304RT02520	SS316RT02520	$1'' \times \frac{3}{4}''$	73.0	0.1970	100
SS304RT03515	SS316RT03515	$1\frac{1}{4}'' \times \frac{1}{2}''$	66.0	0.2336	70
SS304RT03520	SS316RT03520	$1\frac{1}{4}'' \times \frac{3}{4}''$	71.0	0.2570	60
SS304RT03525	SS316RT03525	$1\frac{1}{4}'' \times 1''$	83.0	0.2866	60
SS304RT04215	SS316RT04215	$1\frac{1}{2}'' \times \frac{1}{2}''$	70.0	0.2994	50
SS304RT04220	SS316RT04220	$1\frac{1}{2}'' \times \frac{3}{4}''$	76.0	0.3224	50
SS304RT04225	SS316RT04225	$1\frac{1}{2}'' \times 1''$	82.0	0.3580	50
SS304RT04235	SS316RT04235	$1\frac{1}{2}'' \times 1\frac{1}{4}''$	91.5	0.4666	40
SS304RT05015	SS316RT05015	$2'' \times \frac{1}{2}''$	72.0	0.3768	42
SS304RT05020	SS316RT05020	$2'' \times \frac{3}{4}''$	76.0	0.4112	38
SS304RT05025	SS316RT05025	$2'' \times 1''$	84.0	0.4613	36
SS304RT05035	SS316RT05035	$2'' \times 1\frac{1}{4}''$	92.0	0.5067	36
SS304RT05042	SS316RT05042	$2'' \times 1\frac{1}{2}''$	100	0.5550	36

Note: AISI316L material available upon request.


*This item requires special ordering. Please consult with a salesperson for the estimated lead time.

* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304 THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

REDUCING TEE

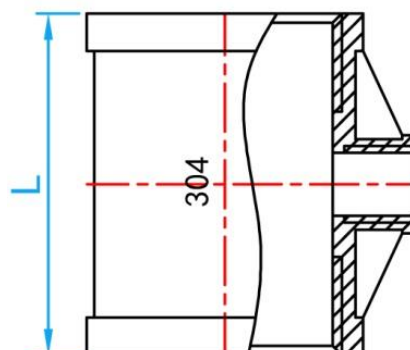

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304RT05015	SS316RT05015	2" × 1/2"	72.0	0.3768	42
SS304RT05020	SS316RT05020	2" × 3/4"	76.0	0.4112	38
SS304RT05025	SS316RT05025	2" × 1"	84.0	0.4613	36
SS304RT05035	SS316RT05035	2" × 1 1/4"	92.0	0.5067	36
SS304RT05042	SS316RT05042	2" × 1 1/2"	100.0	0.5550	36
SS304RT06515	SS316RT06515	2 1/2" × 1/2"	93.0	0.7800	10
SS304RT06520	SS316RT06520	2 1/2" × 3/4"	93.0	0.7600	10
SS304RT06525	SS316RT06525	2 1/2" × 1"	93.0	0.7300	10
SS304RT06535	SS316RT06535	2 1/2" × 1 1/4"	101.0	0.8000	10
SS304RT06542	SS316RT06542	2 1/2" × 1 1/2"	106.5	0.8200	14
SS304RT06550	SS316RT06550	2 1/2" × 2"	118.0	0.8850	10
SS304RT08015	SS316RT08015	3" × 1/2"	100.0	0.9900	8
SS304RT08020	SS316RT08020	3" × 3/4"	100.0	0.9700	8
SS304RT08025	SS316RT08025	3" × 1"	100.0	1.0000	8
SS304RT08035	SS316RT08035	3" × 1 1/4"	100.0	1.1700	8
SS304RT08042	SS316RT08042	3" × 1 1/2"	105.0	1.0800	8
SS304RT08050	SS316RT08050	3" × 2"	125.0	1.1500	8
SS304RT08065	SS316RT08065	3" × 2 1/2"	133.3	1.4820	8
SS304RT10025	SS316RT10025	4" × 1"	113.0	1.7900	10
SS304RT10050	SS316RT10050	4" × 2"	133.2	1.9750	10


Note: AISI316L material available upon request.

* The tolerance for weight is ±5%

STAINLESS STEEL 304/316L THREADED FITTINGS


COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

REDUCING TEE MXF

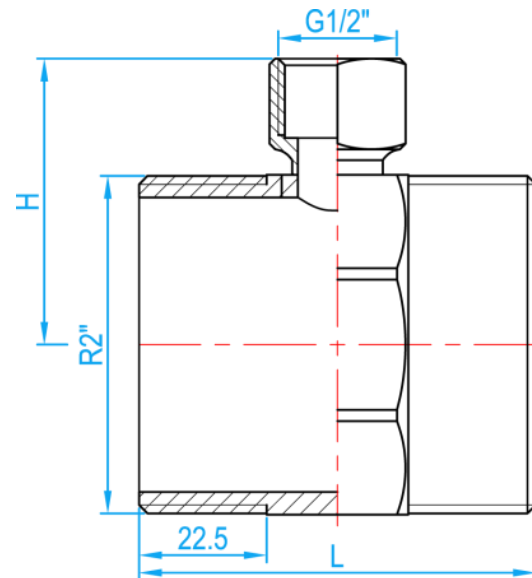

CROSS SECTIONAL VIEW

How to use:

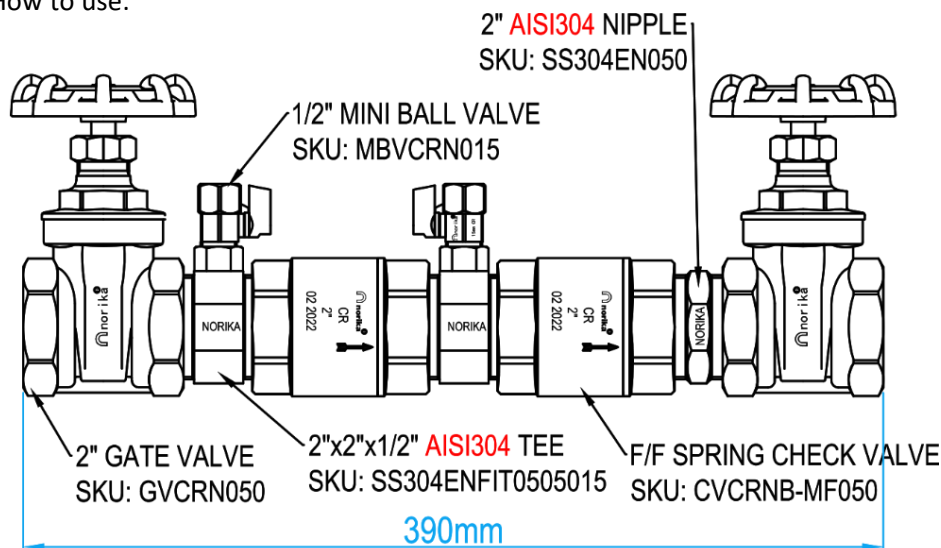

NORIKA MODIFIED DESIGN Second Generation

DIMENSIONS

SKU	Material	DN (inch)	L (mm)	H (mm)	WEIGHT (kg)	PCS/CTN
SS304ENFIT0505015	AISI 304	2"BSPTX2"BSPTX1/2"BSP	70	51	0.404	30
SS316LENFIT0505015*	AISI 316L	2"BSPTX2"BSPTX1/2"BSP	70	51	0.404	30



Note: AISI316L material available upon request.

* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304 THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018
SS 375:2015

UNION

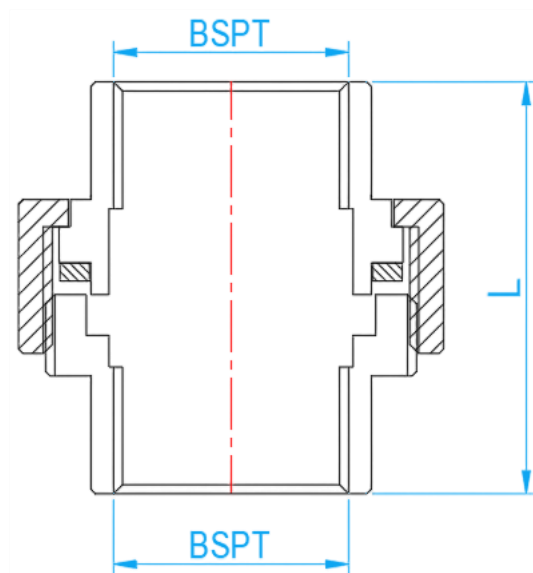

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304U015	SS316U015	½"	38.5	0.1273	250
SS304U020	SS316U020	¾"	44.0	0.2094	150
SS304U025	SS316U025	1"	48.0	0.2757	80
SS304U035	SS316U035	1¼"	52.0	0.3984	60
SS304U042	SS316U042	1½"	55.0	0.4719	40
SS304U050	SS316U050	2"	62.0	0.8210	25
SS304U065	SS316U065	2½"	73.0	1.2500	15
SS304U080	SS316U080	3"	80.0	1.7550	10
SS304U100	SS316U100	4"	96.9	2.9000	6



Note: AISI316L material available upon request.

* The tolerance for weight is ±5%

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018
SS 375:2015

UNION [MXF]

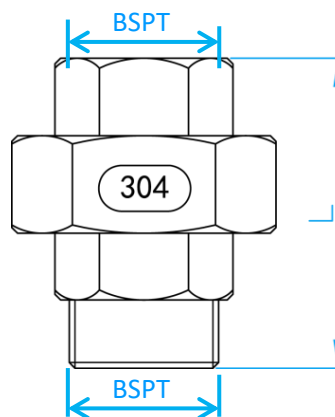

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304U015MF	SS316U015MF	½"	52.7	0.136	150
SS304U020MF	SS316U020MF	¾"	58.0	0.217	120
SS304U025MF	SS316U025MF	1"	70.0	0.301	80
SS304U035MF	SS316U035MF	1¾"	72.0	0.504	50
SS304U042MF	SS316U042MF	1½"	77.0	0.593	40
SS304U050MF	SS316U050MF	2"	90.0	0.944	20
SS304U065MF	SS316U065MF	2½"	103.0	1.555	12



Note: AISI316L material available upon request.

* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018

EQUAL CROSS TEE

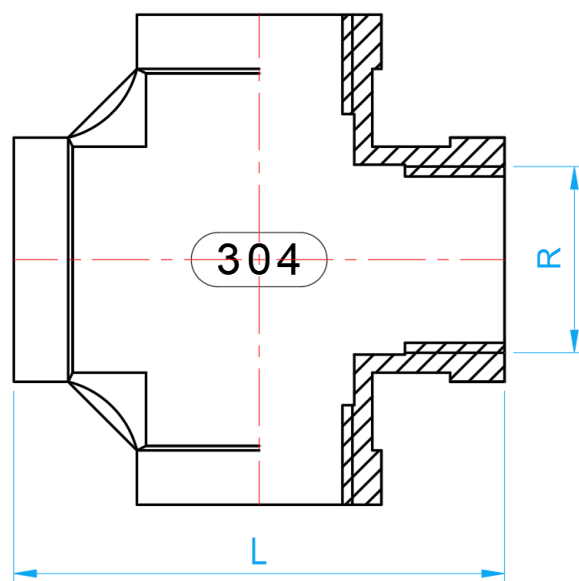

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		R BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304CT015	SS316LCT015	½"	54.2	0.123	150
SS304CT020	SS316LCT020	¾"	63.5	0.170	100
SS304CT025	SS316LCT025	1"	74.2	0.272	50
SS304CT035	SS316LCT035	1¼"	86.0	0.388	48
SS304CT042	SS316LCT042	1½"	94.5	0.513	25
SS304CT050	SS316LCT050	2"	112.0	0.768	12

Note: AISI316L material available upon request.


* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018



SCREW PLUG

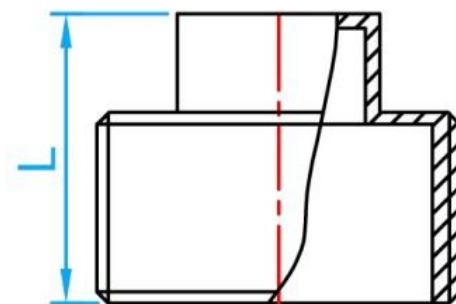

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		DN BSPT THREAD (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L				
SS304SP015	SS316SP015	½" BSPT	21	0.0257	1500
SS304SP020	SS316SP020	¾" BSPT	24	0.0354	500
SS304SP025	SS316SP025	1" BSPT	27	0.0583	100
SS304SP035	SS316SP035	1¼" BSPT	34	0.1045	100
SS304SP042	SS316SP042	1½" BSPT	36	0.1220	100
SS304SP050	SS316SP050	2" BSPT	40	0.1923	120
SS304SP065	SS316SP065	2½" BSPT	40	0.3055	80
SS304SP080	SS316SP080	3" BSPT	44	0.4744	60
SS304SP100	SS316SP100	4" BSPT	59	0.8450	10

Note: AISI316L material available upon request.


* The tolerance for weight is $\pm 5\%$

STAINLESS STEEL 304/316L THREADED FITTINGS

COMPLY WITH BSEN1254-2:1998
AS/NZS 4020:2018



COMBINATION HOSE NIPPLE (KC NIPPLE)

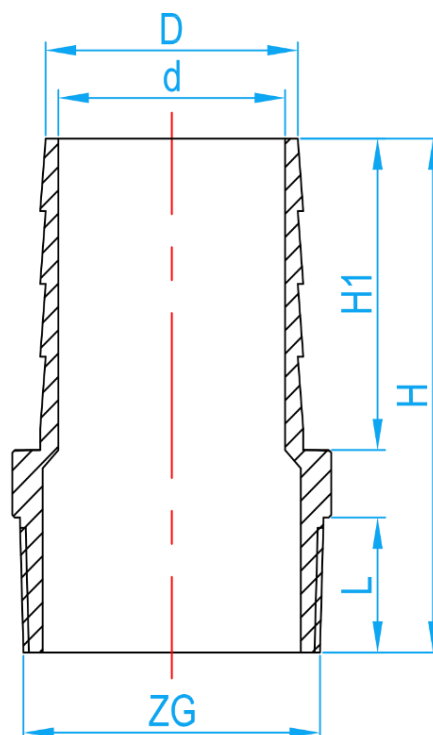

CROSS SECTIONAL VIEW

DIMENSIONS

SKU		ZG (inch x mm)	d (mm)	D (mm)	L (mm)	H1 (mm)	H (mm)	WEIGHT (kg)	PCS/CTN
AISI 304	AISI 316L								
SS304KCN01510	SS316KCN01510	1/2"BSPT x 10	6.5	9.0	15.0	28.0	51.5	0.040	300
SS304KCN015	SS316KCN015	1/2"BSPT x 15	11.5	14.0	16.0	34.0	57.5	0.040	500
SS304KCN020	SS316KCN020	3/4"BSPT x 20	15.0	18.8	18.0	38.0	65.0	0.080	300
SS304KCN025	SS316KCN025	1"BSPT x 25	20.0	24.5	18.5	44.5	75.0	0.120	200
SS304KCN035	SS316KCN035	1 1/4"BSPT x 35	27.5	32.2	20.5	51.0	84.0	0.205	50
SS304KCN042	SS316KCN042	1 1/2"BSPT x 42	33.5	38.6	22.0	56.0	90.0	0.260	50
SS304KCN050	SS316KCN050	2"BSPT x 50	44.8	49.8	26.0	60.0	99.0	0.380	40
SS304KCN065	SS316KCN065	2 1/2"BSPT x 65	57.0	63.0	29.5	64.0	105.5	0.640	30
SS304KCN080	SS316KCN080	3"BSPT x 80	69.0	75.0	31.5	69.5	113.5	0.930	22
SS304KCN100	SS316KCN100	4"BSPT x 100	91.0	97.6	35.0	73.5	123.0	1.465	6

Note: AISI316L material available upon request.

* The tolerance for weight is $\pm 5\%$

Built For Water



Main Office

133 Kitchener Road
Singapore 208517

Mon-Fri: 8:00am - 5:30pm
Sat: 8:00am - 1:00pm
Sun & PH: Closed

North Office

10 Admiralty Street, North
Link Building #02-45
Singapore 757695

Mon-Fri: 8:00am - 5:00pm
Sat: 8:00am - 1:00pm
Sun & PH: Closed