
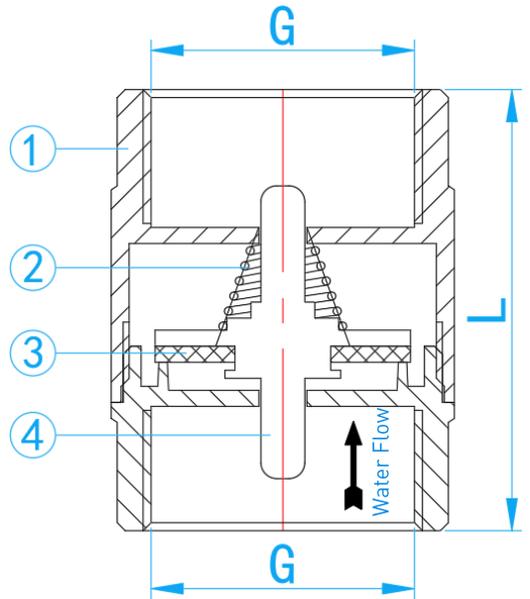


# BRASS CR BSP PISTON SPRING CHECK VALVE [FXF]

COMPLY WITH BS 5154:1991  
AS/NZS 4020:2018  
BS EN 12165:2016  
BS EN 12288:2010  
SS 375:2015  
SS 270:2015

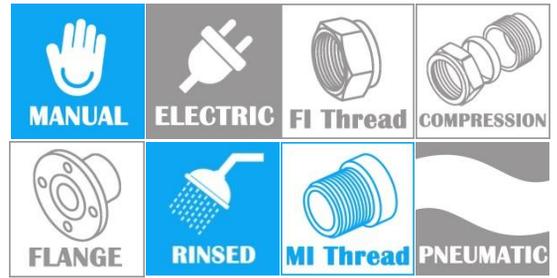

CROSS SECTIONAL VIEW

### STANDARD SPECIFICATIONS

Working Pressure	200 Psi
Applicable Medium	Water

### COMPONENT PARTS

ITEM	PARTS	MATERIAL
1.	Body	DZR Brass
2.	Spring	AISI304
3.	Gasket	EPDM
4.	Spool	DZR Brass

### DIMENSIONS

SKU	SIZE (mm)	G (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
CVCRNB015	15	1/2" BSP	42.5	0.115	200
CVCRNB020	20	3/4" BSP	51.0	0.170	100
CVCRNB025	25	1" BSP	55.0	0.222	90
CVCRNB035	35	1 1/4" BSP	64.5	0.390	48
CVCRNB042	42	1 1/2" BSP	73.5	0.575	40
CVCRNB050	50	2" BSP	81.5	0.880	24
CVCRNB065	65	2 1/2" BSP	88.0	1.365	16