

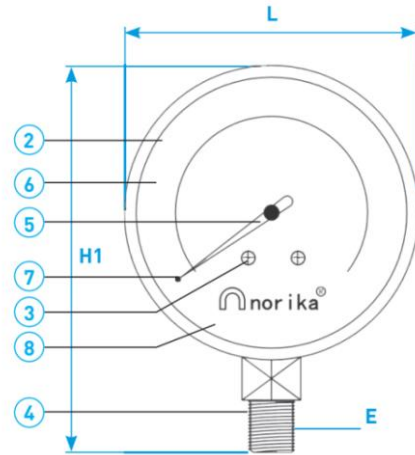


# OIL FILLED PRESSURE GAUGE (MODEL:WT-8001)

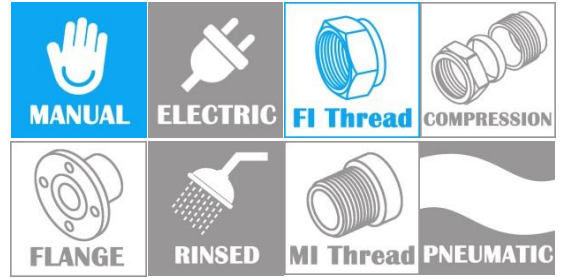

FRONT VIEW

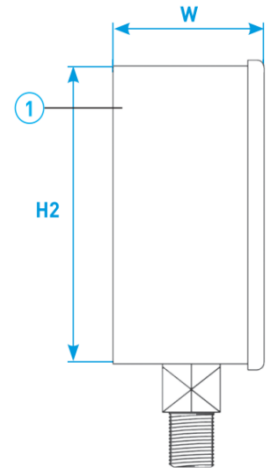

SIDE VIEW

\*Calibration certificates are provided upon customer request  
(Additional added cost will be included)

## COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Case	Steel
2	Viewing Lens	ABS
3	Screw	Stainless Steel
4	Socket	Brass
5	Indicator Needle	Aluminium Black Painted
6	Dial	Aluminium White painted with Black/ Red marking
7	Stop Pin	Aluminium
8	Oil	Glycerin

## STANDARD SPECIFICATIONS

SKU	SIZE(mm)	L(mm)	W(mm)	H1(mm)	H2(mm)	E	PCS/CTN	OPERATING PRESSURE
PG0503000F	50	52	27	71	51	1/4"BSPT	100	0-300Psi kg/cm <sup>2</sup> 20bar
PG0653000F	65	62	28.2	81	60.8	1/4"BSPT	75	
PG0803000F	80	81	32	112	80	3/8"BSPT	50	
PG1003000F	100	109	37	136.6	99	1/2"BSPT	50	
PG1003500F	100	109	37	136.6	99	1/2"BSPT	50	0-350Psi kg/cm <sup>2</sup> 25bar
PG0655000F	65	62	28.2	81	60.8	1/4"BSPT	75	
PG0805000F	80	81	32	112	80	3/8"BSPT	50	
PG1005000F	100	109	37	136.6	99	1/2"BSPT	50	0-500Psi kg/cm <sup>2</sup> 35bar

\* When releasing of pressure, please open release valve slowly to avoid pin out of calibration.