
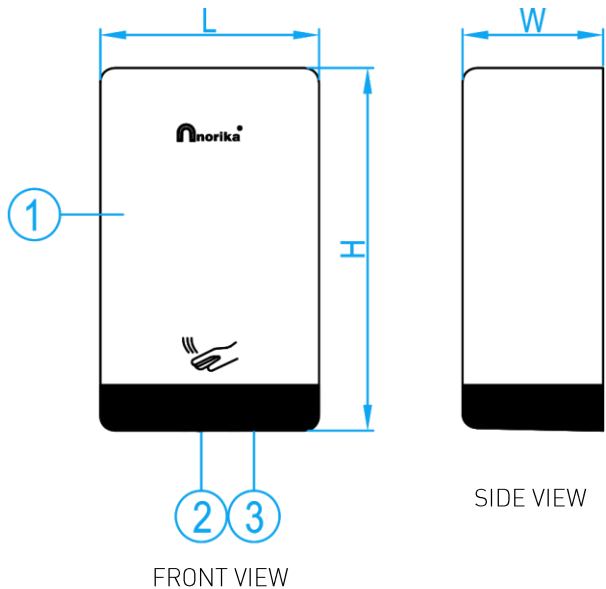


SENSOR OPERATED  
HIGH SPEED HAND DRYER

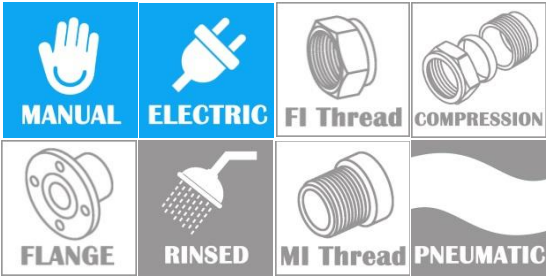

\*45 second cycle to avoid overheating.

CHARACTERISTIC
• Ultra-slim design
• High-speed sensor activation
• Powerful airflow
• Rapid hand drying

COMPONENT PARTS		
ITEM	PARTS	MATERIAL
1.	Cover	ABS
2.	Blade	ABS
3.	Sensor	Circuit Board

STANDARD SPECIFICATIONS							
SKU	VOLTAGE RATING	POWER	MOTOR POWER	HEATER POWER	INSULATION LEVEL	NOISE	TEMPERATURE OF HOT AIR
HDN2822	AC200V~240V	900W	400W	500W	CLASS II	< 75 dB	20°C~40°C

STANDARD SPECIFICATIONS						
SENSING DISTANCE	MOTOR SPEED	WIND SPEED	DIMENSION		WEIGHT (kg)	PCS/CTN
15cm~20cm	32000rpm	82m/sec	255mm (H) x154mm (L) x99mm (W)		1.80	6