



STAINLESS STEEL FLUID SOLENOID VALVE (NORMALLY CLOSED IP65)

COMPLY WITH BS5154:1991
AS/NZS4020:2005
IEC 60529
IEC 60335-1:91

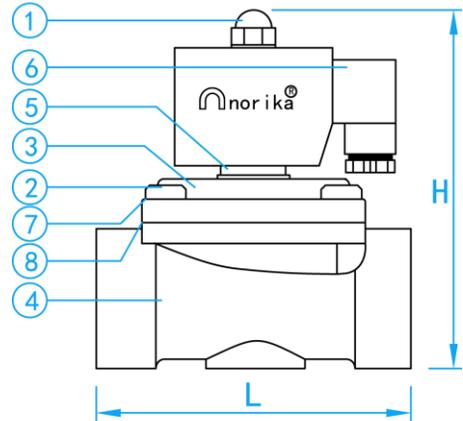

FRONT VIEW

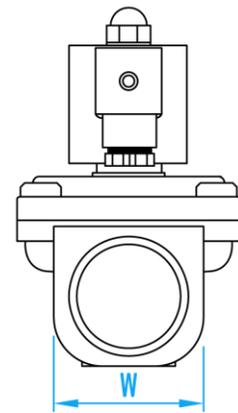

SIDE VIEW

STANDARD SPECIFICATIONS

Nominal Pressure	0-10 Bar
Voltage Rating	240V AC, 24V AC, 24V DC
Current Rating	Size: 15 ~ 25mm : 0.1A : 35 ~ 50mm : 0.22A
Operating Temperature	-5°C ~ 120°C
Waterproof Grade	IP65

DIMENSIONS

SKU	SIZE mm)	L mm)	W (mm)	H (mm)	WEIGHT (kg)	PCS/CTN
SVSSN015 IP65	15	68	27	110	1.0	25
SVSSN020 IP65	20	71	32	117	1.5	25
SVSSN025 IP65	25	98	39.5	125	2.5	25
SVSSN035 IP65	35	115	47	160	3.0	12
SVSSN042 IP65	42	122	58	170	3.5	10
SVSSN050 IP65	50	166	70.5	192	5.2	6

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1.	Nut & Washer	AISI304
2.	Bolt	AISI304
3.	Valve Bonnet	AISI304
4.	Valve Body	AISI304
5.	Spring Plunger	AISI304
6.	DIN Box	BMC
7.	O-Ring	EPDM
8.	Diaphragm	EPDM