SENSOR AUTOMATIC SOAP DISPENSER

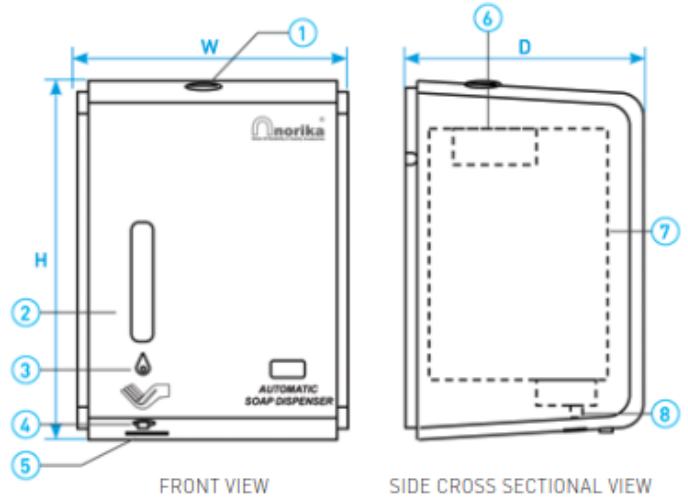| MANUAL	ELECTRIC	FI Thread	COMPRESSION
FLANGE	LIQUID SOAP	WC	SINK

FRONT VIEW

SIDE CROSS SECTIONAL VIEW

CHARACTERISTIC

- Dispenses soaps, lotions & detergents
- Easy installation & maintenance
- Suitable for all types of commercial & industrial use
- High level of hygiene
- Applicable soap viscosity: 1~3500mPa•s (cP)
- Recommended soap viscosity: 1800mPa•s (cP)

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1.	Dome Head Screw	Stainless Steel 304
2.	Soap Level Window	AS
3.	Dispensing Indicator	ABS
4.	Soap Dispensing Nozzle	POM
5.	Sensor Eye Cover	AS
6.	Battery Compartment	ABS
7.	Soap Container	AS
8.	Sensor Eye	ABS

STANDARD SPECIFICATIONS

SKU	POWER & VOLTAGE	CAPACITY	VOLUME PER DROP	AMBIENT TEMPERATURE
SDN600D	9V(6AA alkaline batteries)	1200ml	1ml	0~45℃

STANDARD SPECIFICATIONS

INDUCE ISTANCE	COLOUR	DIMENSIONS	WEIGHT (Kg)	PCS/CTN
10~15cm	White	230mm(H) x 143mm (W) x 117mm(D)	1.20kg	12