


FUSION BONDED EPOXY COATED HUBLESS SHORT PIPE WITH ACCESS DOOR

COMPLY WITH EN877:2010 01

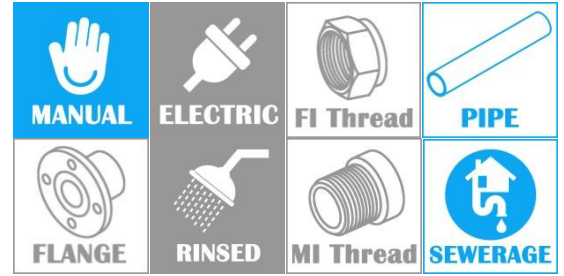


COATING CHARACTERISTIC

Fittings:

Epoxy fittings inside and outside: Fusion bonded epoxy coating.

Coating Thickness: Min- 240µm

SHORT PIPE WITH ACCESS DOOR

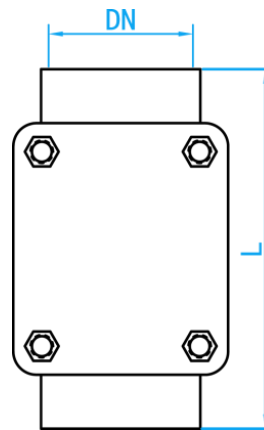

FRONT VIEW



*Open the inspection cover seal and manually clear any blockage through the wide access door for easier maintenance.

DIMENSIONS

SKU	DN (mm)	L (mm)	WEIGHT (kg)
HUBSP080EPC	75	220	2.30
HUBSP100EPC	100	340	7.52
HUBSP150EPC	150	395	12.80
HUBSP200EPC	200	465	19.80
HUBSP250EPC	250	575	38.00

Notes: The tolerance for Weight is $\pm 10\%$.