



DZR BRASS PRESS FIT SPRING CHECK VALVE WITH INSPECTION HOLE

COMPLY WITH BS 5154:1991
BS EN 12288:2010



SKU: CVCRPFN015~42
CVCRPFN065

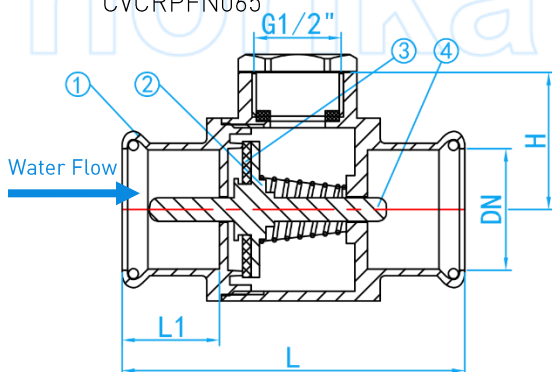

SPECIFICATION


Operating pressure	PN16
Applicable Medium	Water

COMPONENT PARTS


ITEM	PARTS	MATERIAL
1.	Body	DZR Brass
2.	Spring	AISI304
3.	Gasket	EPDM
4.	Spool	DZR Brass

DIMENSIONS

SKU	DN (mm)	H (mm)	L1 (mm)	L (mm)	WEIGHT (kg)	PCS/CTN
CVCRPFN015	15	29.2	20	66.0	0.215	96
CVCRPFN020	20	33.3	21	70.5	0.290	72
CVCRPFN025	25	35.5	23	81.0	0.370	54
CVCRPFN035	35	41.7	26	91.5	0.560	40
CVCRPFN042	42	44.8	30	104.5	0.730	30
CVCRPFN050	50	50.0	36	139.5	1.204	20
CVCRPFN065	65	62.3	50	161.5	2.000	12

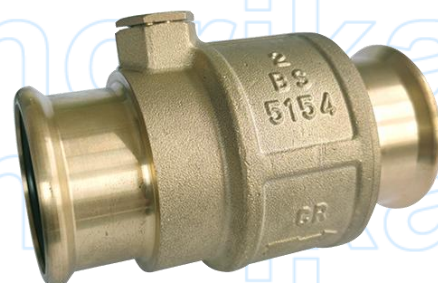

SKU: CVCRPFN050

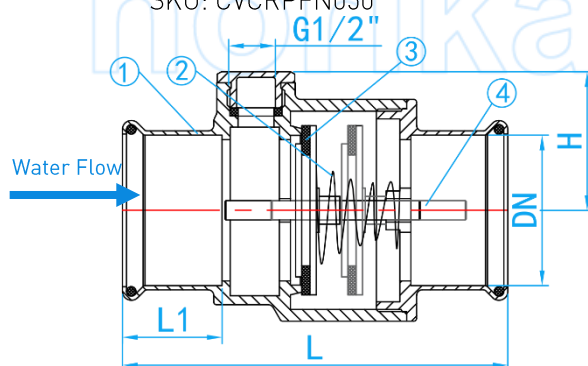



CROSS SECTIONAL VIEW



USAGE OF THE PRODUCT ACCORDING TO SS636

DZR BRASS PRESS FIT SPRING CHECK VALVE WITH INSPECTION HOLE

COMPLY WITH BS 5154:1991
BS EN 12288:2010

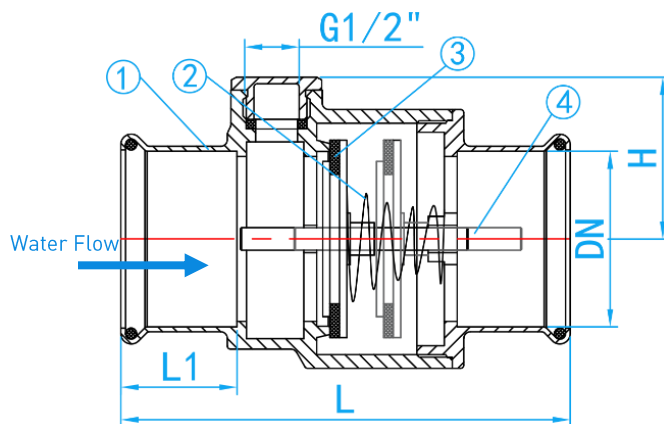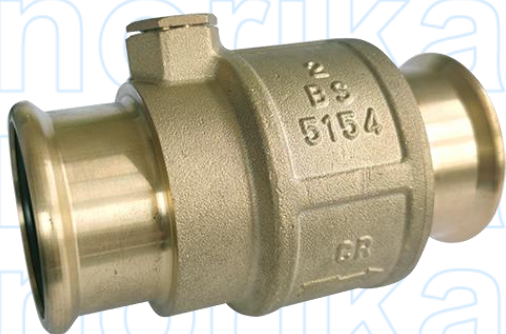


CROSS SECTIONAL VIEW

SPECIFICATION

Operating pressure	PN16
Applicable Medium	Water

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1.	Body	DZR Brass
2.	Spring	AISI304
3.	Gasket	EPDM
4.	Spool	DZR Brass

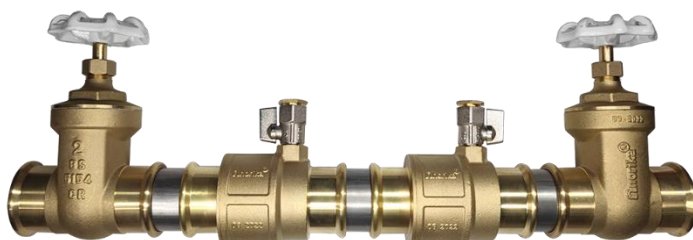

USAGE OF THE PRODUCT ACCORDING TO SS636

DIMENSIONS

SKU	DN (mm)	H (mm)	L1 (mm)	L (mm)	WEIGHT (kg)	PCS/CTN
CVCRPFN015	15	29.2	20	66.0	0.215	105
CVCRPFN020	20	33.3	21	70.5	0.290	90
CVCRPFN025	25	35.5	23	81.0	0.370	60
CVCRPFN035	35	41.7	26	91.5	0.560	40
CVCRPFN042	42	44.8	30	104.5	0.730	32
CVCRPFN050	50	50.0	36	139.5	1.204	20
CVCRPFN065	65	62.3	50	161.5	2.000	12