

DUCTILE IRON HEAVY DUTY RECESSED MANHOLECOVER&FRAME








COMPLY WITH BSEN124:1994 (230KN & 400KN) SS30:1999 (2012)

Type of Weight (Symbol)	SS30 Grade	Design Load	Place of Installation	BSEN124	Design Load
	A2	230KN	In carriageways not exceeding 0.5m away from kerb side channels of all roads and in carriageways of minor residential roads.	C250	230KN
<u> </u>	A1	400KN	In carriageways of expressways, arterial, industrial roads and parking areas for all types of road vehicles.	D400	400KN

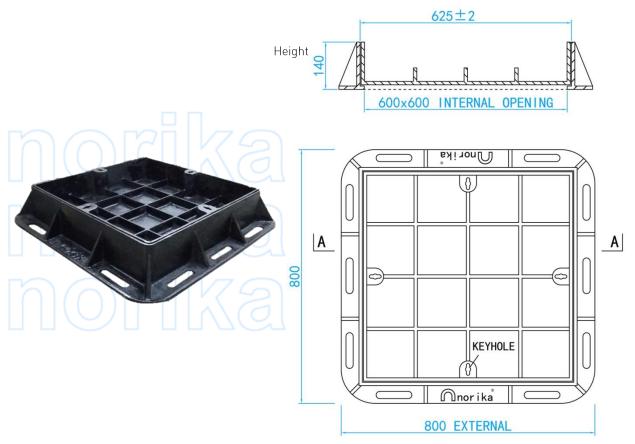

TOP VIEW

DIMENSIONS							
SKU	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (mm)	WEIGHT (kg)	Remarks/ Optional	
DIHDRMC	Ductile Iron	600 X 600	800 X 800	140	86	Heavy Duty (A2 GRADE)	
DIHDRMC-D400	Ductile Iron	600 X 600	800 X 800	140	111	Heavy Duty (A1 GRADE)	