




ALUMINUM ALLOY SAFETY HANDRAIL

COMPLY WITH GENERAL REQUIREMENTS OF PUB/WRN/STD/102

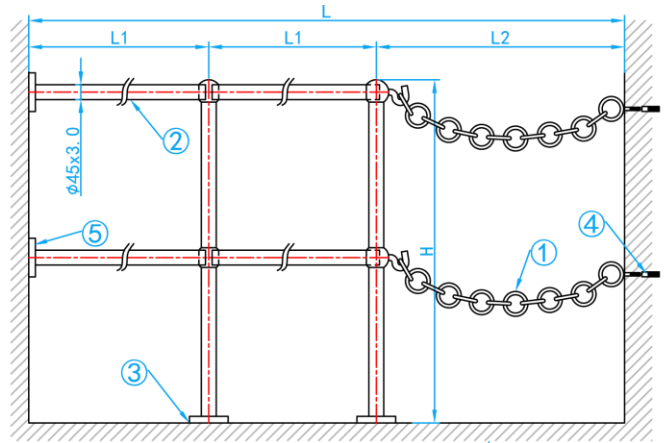

* Length could be customized.

DIMENSIONS

SKU	L1 (mm)	L2 (mm)	L (mm)	H (mm)	WEIGHT (Kg)
RCSH1500	750×1	750	1500	1037.5	9.500
RCSH1800	1050×1	750	1800	1037.5	10.000
RCSH2150	1400×1	750	2150	1037.5	12.000
RCSH2400	850×2	700	2400	1037.5	13.000
RCSH2500	900×2	700	2500	1037.5	10.500
RCSH3000	1150×2	700	3000	1037.5	11.100
RCSH3080	1090×2	900	3080	1037.5	11.200
RCSH3200	1150×2	900	3200	1037.5	11.400
RCSH3300	1300×2	700	3300	1037.5	13.000
RCSH3600	970×3	690	3600	1037.5	13.500
RCSH3800	1033×3	700	3800	1037.5	13.750
RCSH5000	1075×4	700	5000	1037.5	17.500
RCSH5400	1125×4	900	5400	1037.5	17.500
RCSH5500	1200×4	700	5500	1037.5	18.000
RCSH6500	1160×5	700	6500	1037.5	19.000
RCSH7500	1320×5	900	7500	1037.5	20.000

FRONT VIEW

APPLICATIONS

Aluminum alloy safety hand railings are used to prevent trip and fall hazards in the manhole.

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Safety Chain	Aluminum Alloy
2	Rail with Flange	Aluminum Alloy
3	Rubber Gasket	EPDM
4	Drop In Anchor 3/8"	AISI 316
5	Raw Plug M10	AISI 316