
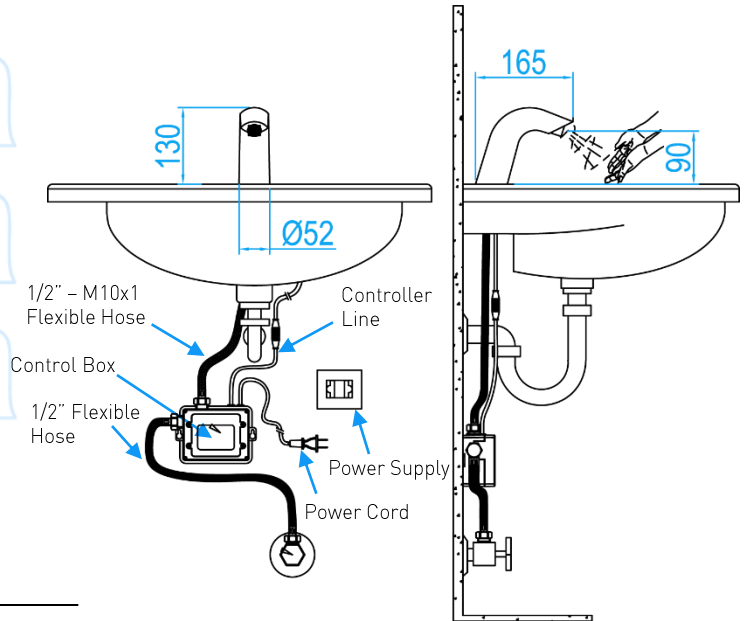


SENSOR BASIN FAUCET TAP

COMPLY WITH BS EN 200:2008
 SS 448: 1998
 BSEN248:2002
 AS/NZS 4020:2005
 SS375:2015

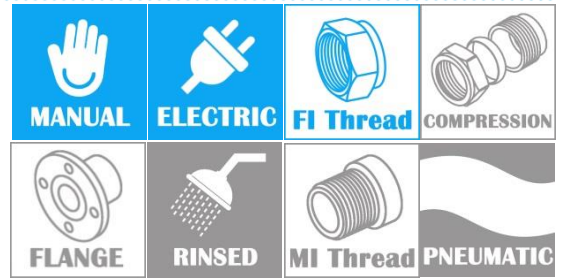

FRONT VIEW

SIDE VIEW

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1.	Sensor Eye	PC
2.	Faucet Body	Brass
3.	Set Screw	AISI304
4.	O-ring	EPDM
5.	Flow Regulator and Accelerator	POM / DZR Brass
6.	Valve Spool	DZR Brass

CHARACTERISTIC

- Suitable for public, commercial and institutional washrooms.
- Touch-free operation through infra-red sensor.
- Saves water through built-in volume control and jet regulator,
- Corrosion-resistant material.
- Easy installation and maintenance.

STANDARD SPECIFICATIONS

SKU	APPLICABLE WATER PRESSURE	WATER TEMPERATURE	ENVIRONMENTAL TEMPERATURE	WATER SUPPLYING CALIBER	POWER SUPPLY	ALTERNATIVE POWER SUPPLY
STN8110AD	0.05-0.8MPa	20°-60°C	1-55°C	1/2" BSP	AC220V~240V	DC 6V 4xAA Size Alkaline Batteries [Estimated 6 months lifespan]

STANDARD SPECIFICATIONS

SENSOR DISTANCE	VALVE CLOSING DELAY	FLOW RATE	WEIGHT (kg)	PCS/CTN
10 cm	0.5-2 Seconds. (Maximum preset timing of not more than 60 secs, water supply will automatically cut-off when hand is removed.)	2 litres / min	2.050	10