


# SS213/SS272 uPVC PIPES

COMPLY WITH BS5255, BS4660

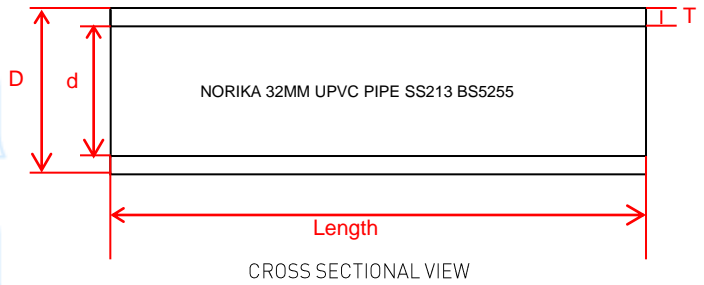

## FLUID AND APPLICATIONS

SS213 PIPES: Commonly used for sanitation application and are used in apartments, industrial & commercial buildings. It is also suitable for application such as rainwater down pipes and for other water discharge purposes.

SS272 PIPES: Commonly laid underground as sewer or subsoil drainage for parks and fields. The golden brown gloss finish fabricated color reduces heat absorptions.



## STANDARD SPECIFICATIONS

Pipe Standard	SS213:1983	SS272:2012
Standard Length	5.8 meters	
Standard Color	White (SS213), Golden Brown (SS272)	
Material	uPVC	

## DIMENSIONS

SS213:1983 BS5255:1989

STOCK CODE	DN (mm)	D (mm)	d (mm)	T (mm)	WEIGHT (kg)
PIP21335N	35	36.2	32	2.1	2
PIP21342N	42	42.8	38.2	2.3	3
PIP21350N	50	55.7	50.9	2.4	4
PIP21380N	80	82.3	76.3	3	7
PIP213100N	100	110	103.6	3.2	10
PIP213150N	150	160	152	4	18

SS272:1983 BS4660:2000

PIP272100N	100	110	103.6	3.2	10
PIP272150N	150	160	152	4	18