
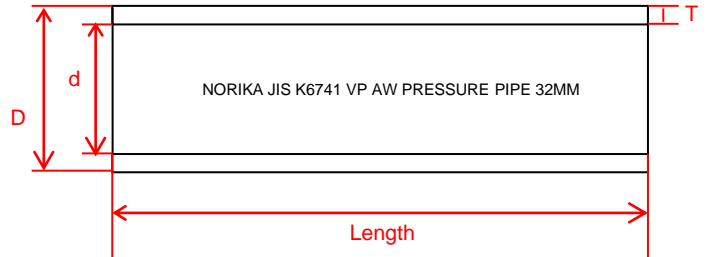


VP/AW uPVC PIPES

COMPLY WITH JIS K6741: 2016

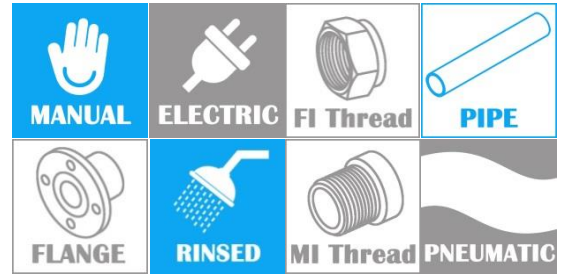

CROSS SECTIONAL VIEW

FLUID AND APPLICATIONS :

VP/AW PIPES: Generally convey pressured fluids and are commonly used for industrial application in combination with pumps and mechanical plants.

STANDARD SPECIFICATIONS

Pipe Standard	Class VP/AW
Working Pressure	10 Bar (145 PSI)
Standard Length	5.8 meters
Standard Color	Grey
Material	uPVC

DIMENSIONS

SKU	DN (mm)	D (mm)	d (mm)	T (mm)	WEIGHT(kg)
PIPAW015N	15	21.8	16.4	2.7	1.52
PIPAW020N	20	25.8	20.4	2.7	2.65
PIPAW025N	25	31.8	25.6	3.1	2.84
PIPAW035N	35	37.8	31.6	3.1	3.21
PIPAW042N	42	47.8	40.6	3.6	4.68
PIPAW050N	50	60.0	51.8	4.1	6.65
PIPAW065N	65	75.7	67.5	4.1	8.00
PIPAW080N	75	88.7	77.7	5.5	13.05
PIPAW100N	100	114.0	100.8	6.6	20.20
PIPAW125N	125	139.2	125.2	7.0	30.00
PIPAW150N	150	164.5	147.2	8.9	39.70
PIPAW200N	200	215.3	194.7	10.3	67.00
PIPAW250N	250	266.1	240.7	12.7	100.10
PIPAW300N	300	317.0	286.8	15.1	144.00