
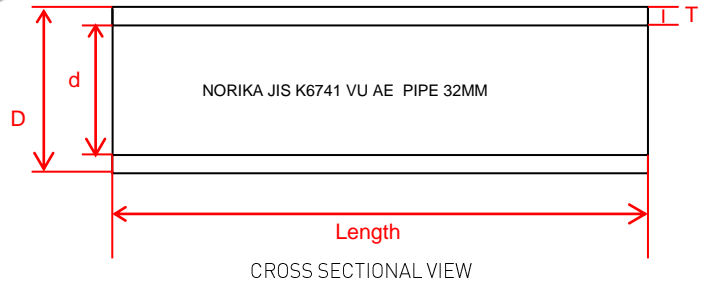


VU/AE uPVC PIPES

COMPLY WITH JIS K6741:2016

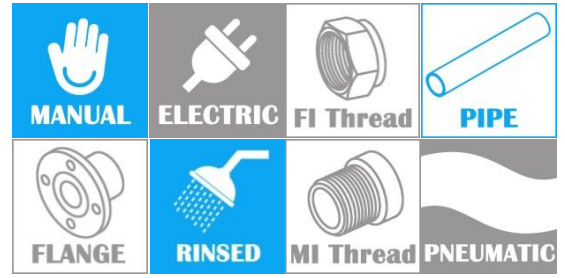

FLUID AND APPLICATIONS :

VU/AE PIPES: Generally convey lower pressured fluids and are commonly used as cable ducting flush pipes, water discharge outlet for air conditioning and fume exhaust systems.

STANDARD SPECIFICATIONS

Pipe Standard	Class VU/AE
Working Pressure	5.9 Bar (85 PSI)
Standard Length	5.8 meters
Standard Color	Grey
Material	uPVC

DIMENSIONS

SKU	DN (mm)	D (mm)	d (mm)	T (mm)	WEIGHT(kg)	Remark
PIPAE015N	15	21.8	18.2	1.8	1.00	-
PIPAE020N	20	25.8	22.2	1.8	1.35	-
PIPAE025N	25	31.8	28.2	1.8	1.89	-
PIPAE032N	35	37.8	34.2	1.8	2.00	-
PIPAE042N	42	47.8	44.2	1.8	2.32	-
PIPAE050N	50	60.0	56.4	1.8	3.00	-
PIPAE065N	65	75.7	71.3	2.2	5.00	-
PIPAE080N	75	88.7	83.3	2.7	7.00	-
PIPAE100N	100	114.0	107.8	3.1	11.00	-
PIPAE125N	125	139.2	131.0	4.1	16.00	-
PIPAE150N	150	165.0	154.8	5.1	24.00	-
PIPAE200NS	200	216.0	203.0	6.5	35.00	(one end socket)
PIPAE250NS	250	267.0	251.4	7.8	52.00	(one end socket)
PIPAE300NS	300	318.0	299.6	9.2	74.00	(one end socket)
PIPAE350NS	350	370.0	348.8	10.6	119.00	(one end socket)
PIPAE400NS	400	420.0	396.4	11.8	150.00	(one end socket)
PIPAE450NS	450	470.0	443.6	13.2	187.00	(one end socket)