EPOXY-COATED MULTI JET/ WOLTMAN DRY DIAL COLD WATER METER (R80)

MANUAL | RINSED | Water Meter | MI Thread | FLANGE

COMPLY WITH ISO 4064: 2014

Threaded End

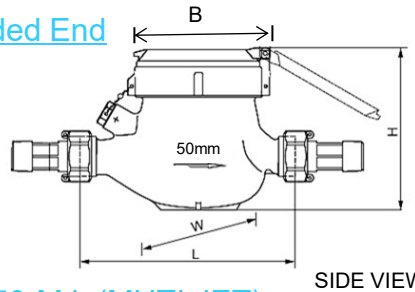

SIDE VIEW

WMN50-MJ (MUTI JET)

Flange End



SIDE VIEW

WMN50F-MJ (WOLTMAN)

1.Colour ---Grey.
2.Information on the lid—
(a) Water meter usage monitoring purpose
(b) Date of installation and
(c) Remark.

STANDARD SPECIFICATIONS

Water Temperature	0 ~ 30˚C
Operating Pressure	≤ 1.6Mpa
Accuracy Class / Performance ratio (R)	R80

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Lid	Plastic
2	Sealed Register	ABS
3	Sealing Ring	Brass
4	Body	Epoxy-coated WMN050-MJ: Brass WMN050F-MJ: Ductile Iron
5	Multi Jet Impeller	Plastic

FLOW RATE SPECIFICATIONS

SKU	R [Q_3 / Q_1]		Q1 Minimum	Q2 Transitional	Q3 Nominal	Q4 Maximum
	Horizontal	Vertical	flow rate [l /h]	flow rate [l /h]	flow rate [m³ /h]	flow rate [m³ /h]
WMN050-MJ	R80	NA	312.5	500	25	31.25
WMN050F-MJ	R80	R50	312.5	500	25	31.25

DIMENSIONS

SKU	SIZE(mm)	L(mm)	B(mm)	H(mm)	W(mm)	WEIGHT (kg)	PCS/CTN
WMN050-MJ	50	300	145	177	145	5.51	1

DIMENSIONS

SKU	SIZE(mm)	L(mm)	H(mm)	G(mm)	Bolt Tightening torque	WEIGHT (kg)	PCS/CTN
WMN050F-MJ	50	300	185	300.5	70	11.2	1

*1] Ensure water meter is installed in the correct water flow direction.
2] Always ensure to select the correct size and spec for the meter.
3] WMN050-MJ meters are only suitable to be installed in the horizontal position. WMN050F-MJ meters can be installed in the horizontal and vertical position. Failing to comply will result in damaging the meter and warranty will be voided.

Copyright. All Rights Reserve. Norika®
Norika is constantly seeking product improvements. Therefore, its products are subject to change if deemed necessary.