

# SS213/SS272 uPVC PIPES


COMPLY WITH BS5255, BS4660



SS213



SS272

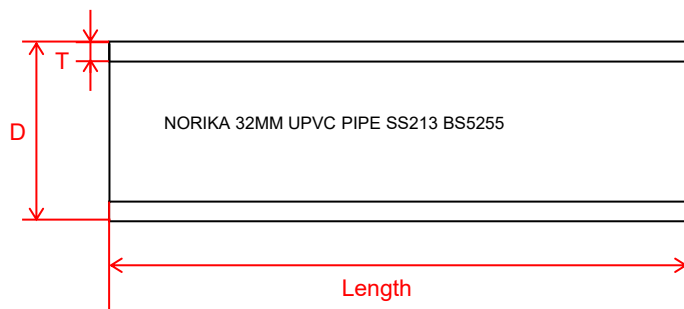

CROSS SECTIONAL VIEW

## FLUID AND APPLICATIONS

| STANDARD SPECIFICATIONS |                                     |            |
|-------------------------|-------------------------------------|------------|
| Pipe Standard           | SS213:1983                          | SS272:2012 |
| Standard Length         | 5.8 meters                          |            |
| Standard Color          | White (SS213), Golden Brown (SS272) |            |
| Material                | uPVC                                |            |

SS213 PIPES: Commonly used for sanitation application and are used in apartments, industrial & commercial buildings. It is also suitable for application such as rainwater down pipes and for other water discharge purposes.

SS272 PIPES: Commonly laid underground as sewer or subsoil drainage for parks and fields. The golden brown gloss finish fabricated color reduces heat absorptions.

## DIMENSIONS

SS213:1983 BS5255:1989

| SKU            | DN (mm) | D (mm)      | T (mm)  | L (mm) | WEIGHT (kg) |
|----------------|---------|-------------|---------|--------|-------------|
| PIP213035      | 35      | 36.2-36.5   | 2.1-2.4 | 5800   | 2           |
| PIP213042      | 42      | 42.8-43.1   | 2.3-2.6 | 5800   | 3           |
| PIP213042-2.9M | 42      | 42.8-43.1   | 2.3-2.6 | 2900   | 1.5         |
| PIP213050      | 50      | 55.7-56.0   | 2.4-2.7 | 5800   | 4           |
| PIP213050-2.9M | 50      | 55.7-56.0   | 2.4-2.7 | 2900   | 2           |
| PIP213080      | 80      | 82.3-82.7   | 3.0-3.5 | 5800   | 7           |
| PIP213100      | 100     | 110.0-110.4 | 3.2-3.6 | 5800   | 10          |
| PIP213100-2.9M | 100     | 110.0-110.4 | 3.2-3.6 | 2900   | 5           |
| PIP213150      | 150     | 160.0-160.5 | 4.0-4.5 | 5800   | 18          |

SS272:1983 BS4660:2000

|           |     |             |         |      |    |
|-----------|-----|-------------|---------|------|----|
| PIP272100 | 100 | 110.0-110.4 | 3.2-3.6 | 5800 | 10 |
| PIP272150 | 150 | 160.0-160.5 | 4.0-4.5 | 5800 | 18 |