



STAINLESS STEEL 316L PIPE WITH POLISHED FINISHING

COMPLY WITH BSEN10312:2002

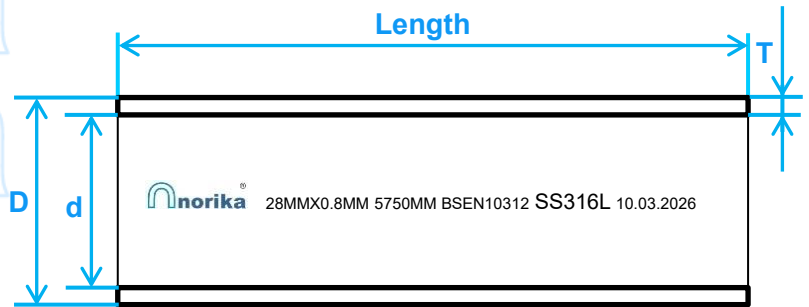

A Product of the nPressGuard® Solution

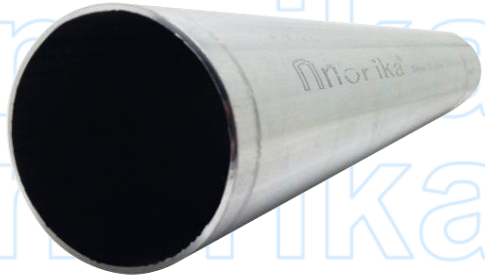


CROSS SECTION VIEW

* Polished finishing for improved appearance, enhanced rust resistance, easier cleaning, and longer service life.

STANDARD SPECIFICATIONS

Working Pressure	25 Bar 362 PSI
Working Temperature	0 ~ 85°C
Standard Length	5.8 meters
Material	Stainless steel 316L
Melting Point	1375-1400°C (2507-2552°F)
Surface Finish	Polished

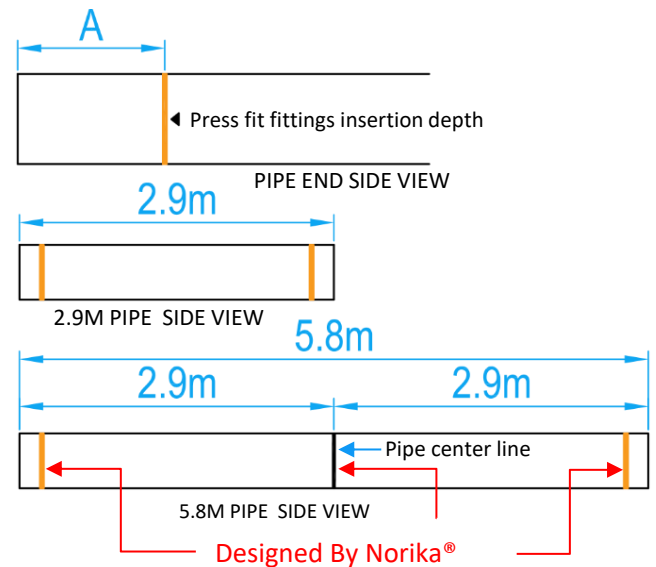

DIMENSIONS

SKU	DN	D (mm)	d (mm)	T (mm)	Insertion Depth A (mm)	L (mm)	WEIGHT (kg)	2.9m PIPE		
								SKU	L (mm)	WEIGHT (kg)
PIPSS316L015	15	15.06-15.15	13.8	0.6	20	5800	1.250	PIPSS316L015-2.9M	2900	0.624
PIPSS316L020	22	22.07-22.18	20.6	0.7	21	5800	2.420	PIPSS316L020-2.9M	2900	1.106
PIPSS316L025	28	28.07-28.18	26.4	0.8	22	5800	3.110	PIPSS316L025-2.9M	2900	1.418
PIPSS316L035	35	35.09-35.23	33.0	1.0	26	5800	4.990	PIPSS316L035-2.9M	2900	2.265
PIPSS316L042	42	42.09-42.23	39.8	1.1	30	5800	6.430	PIPSS316L042-2.9M	2900	3.393
PIPSS316L050	54	54.09-54.23	51.6	1.2	35	5800	9.010	PIPSS316L050-2.9M	2900	4.390
PIPSS316L065	67	66.80-67.03	64.6	1.2	50	5800	11.16	PIPSS316L065-2.9M	2900	5.635
PIPSS316L080	76	76.20-76.43	73.0	1.5	51	5800	15.93	PIPSS316L080-2.9M	2900	8.300
PIPSS316L100	108	108.10-108.33	105.0	1.5	75	5800	22.66	PIPSS316L100-2.9M	2900	11.900

NOTE:

1. Wall thickness tolerance standard is $\pm 10\%$.
2. The 5.8m length pipes comes with a pre-cut length of 2.9m (as shown above).