


MULTI-LOCK DRAIN TEST PLUGS

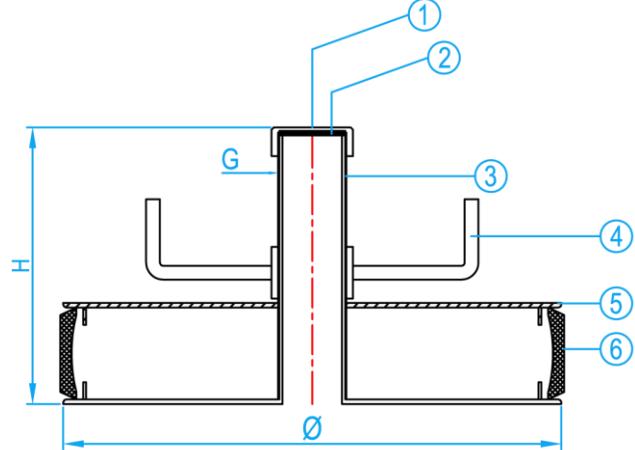

CROSS SECTION VIEW

OPERATING INSTRUCTIONS

- 1 Select the correct size of the plug to suit the internal diameter of the pipe.
- 2 Remove any grease or foreign material from installation point.
- 3 Ensure no dirt is trapped between seal of plug and plates.
- 4 Ensure plug is inserted square to pipe wall.
- 5 Ensure wing nut and sealing cap are fully tightened.

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1.	Cap	Galvanized Iron
2.	Rubber Washer	Natural Rubber
3.	Screw	Galvanized Iron
4.	Nut	Galvanized Iron
5.	Plate	Galvanized Iron
6.	Rubber	Natural Rubber

STANDARD SPECIFICATIONS

SKU	SIZE(mm)	G (inch)	H (mm)	Ø (mm)	RANGE MIN/MAX (mm)	WEIGHT (kg)
TP0375	375	2"	150	360	370-400	12.18
TP0400	400	2"	150	385	405-425	13.44
TP0450	450	2"	150	435	445-475	16.20
TP0500	500	2"	230	485	500-525	19.30
TP0525	525	2"	230	510	520-555	21.30
TP0550	550	2"	230	535	534-569	24.30
TP0600	600	2"	230	585	596-630	26.40