
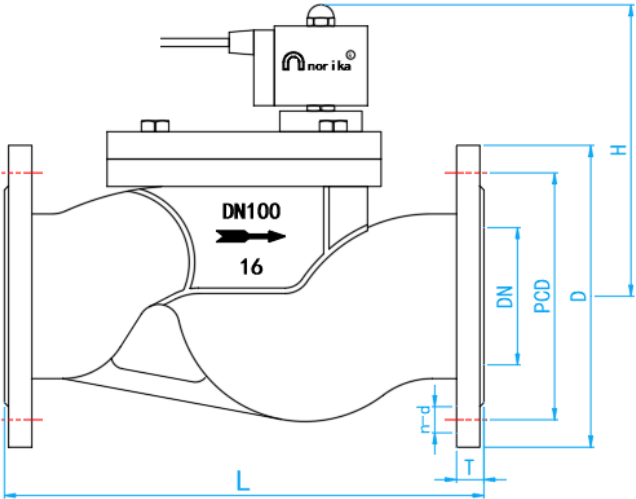


2/2 WAY STAINLESS STEEL 304
PILOT PISTON TYPE FLANGE
ENDED SOLENOID VALVE
[NORMALLY CLOSED IP67]

COMPLY WITH BS EN 12266-1
BS EN 1092-1
AS/NZS4020
SS 375 & SS 270

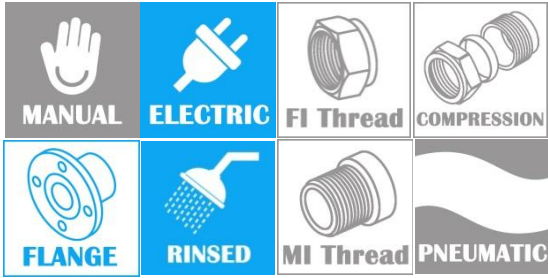

* Note: Normally closed when powered off.

COMPONENT PARTS		
ITEM	PARTS	MATERIAL
1	Nut	AISI304
2	Bolt	AISI304
3	Valve Bonnet	AISI304
4	Valve Body	AISI304
5	Spring Plunger	AISI304
6	DIN Box	BMC
7	O-ring	FKM
8	Diaphragm	EPDM

SIDE VIEW

STANDARD SPECIFICATIONS	
Nominal Pressure	0.5~16 Bar
Optional Voltage Rating	240V AC
Medium	Fluids With Viscosity below 50CST
Operating Temperature	-10℃ ≤ t ≤ 120℃
IP Grade	IP67

DIMENSIONS									
SKU	DN (mm)	L (mm)	H (mm)	D (mm)	PCD (mm)	T (mm)	n-d (mm)	WEIGHT (kg)	PCS/CTN
SVSSN065F IP67	65	290	265	185	145	20	4-18	12.723	1
SVSSN080F IP67	80	310	276	200	160	20	8-18	15.390	1
SVSSN100F IP67	100	350	373	220	180	22	8-18	20.256	1
SVSSN150F IP67	150	480	440	285	240	24	8-22	52.429	1

*The solenoid valves are only suitable to be installed in the horizontal position.