BRASS CR PRESS FIT GATE VALVE (PFXPF)

PRESSGUARD® The Complete Press-Fit Solution by Norika

A Product of the nPressGuard® Solution

COMPLY WITH BS5154:1991
BS EN 12288:2010
SS375:2015
SS270:2015
AS/NZS4020:2018
BSEN12165:2016

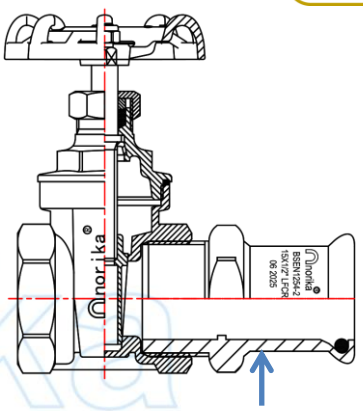

PRESSFIT [MI] ADAPTOR
SKU: PFNMIA

12. Directional Plate

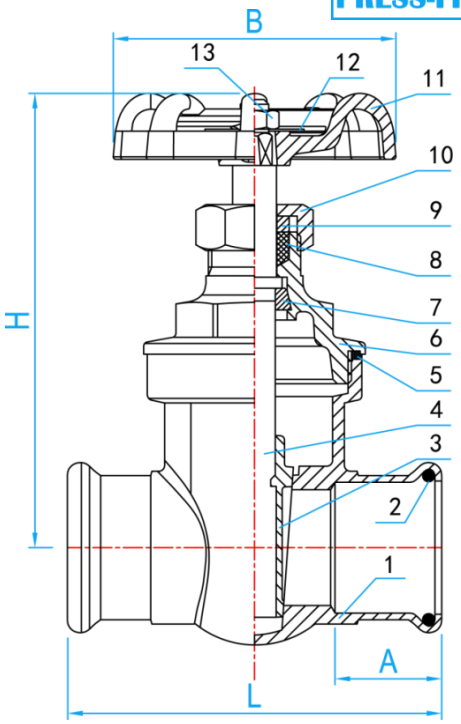

CROSS SECTIONAL VIEW

COMPONENT PARTS		
ITEMS	PARTS	MATERIAL
1	Body	Brass
2	O-Ring	EPDM
3	Disk	Brass
4	Stem	Brass
5	Gasket	PTFE
6	Bonnet	Brass
7	Lock Cap	Brass
8	Gland Packing	PTFE
9	Gland	Brass
10	Nut	Brass
11	Hand Wheel	Cast Iron
12	Directional Plate	Aluminum Plate
13	Wheel Nut	Brass

*The tolerance for weight is ±5%

STANDARD SPECIFICATIONS	
Working Pressure	PN16
Working Temperature	0°C ≤ t ≤ 85° C
Applicable Medium	Water

DIMENSIONS

SKU	SIZE (mm)	L (mm)	H (mm)	A (mm)	B (mm)	Switch Turns	WEIGHT (kg)	PCS/CTN
GVCRPFN015	15	61.0	73	20	53	4	0.235	80
GVCRPFN020	22	70.0	84	21	53	6	0.332	60
GVCRPFN025	28	80.6	98	23	59	7	0.476	40
GVCRPFN035	35	91.5	112	26	72	6	0.728	30
GVCRPFN042	42	100.0	130	30	72	7	0.961	24
GVCRPFN050	54	117.0	160	35	85	9	1.658	12
GVCRPFN065	67	158.0	194	50	110	11	2.924	6
GVCRPFN080	76	180.0	230	55	145	13	4.870	4

Copyright © Norika®. All Rights Reserved.
Norika continually improves its products and reserves the right to modify specifications without prior notice.