
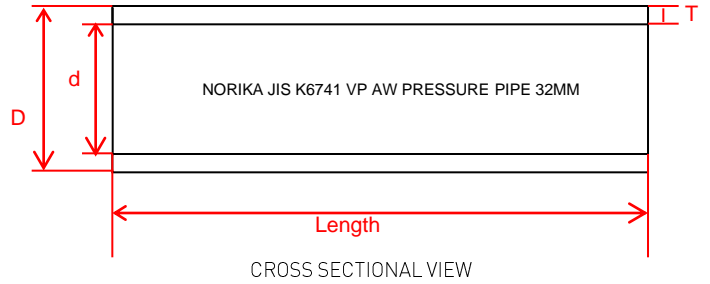


# VP/AW uPVC PIPES

COMPLY WITH JIS K6741: 2016

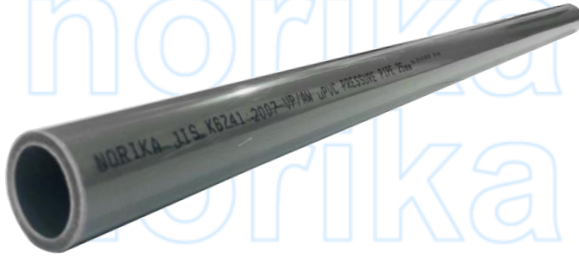

**FLUID AND APPLICATIONS :**

VP/AW PIPES: Generally convey pressured fluids and are commonly used for industrial application in combination with pumps and mechanical plants.

**STANDARD SPECIFICATIONS**

Pipe Standard	Class VP/AW
Working Pressure	10 Bar (145 PSI)
Standard Length	5.8 meters
Standard Color	Grey
Material	uPVC

**DIMENSIONS**

DN (mm)	D (mm)	JIS 6741:2016 VP/AW			
		STOCK CODE	d (mm)	T (mm)	WEIGHT (kg)
15	21.8	PIPAW015N	16.4	2.7	1.52
20	25.8	PIPAW020N	20.4	2.7	2.65
25	31.8	PIPAW025N	25.6	3.1	2.84
35	37.8	PIPAW035N	31.6	3.1	3.21
42	47.8	PIPAW042N	40.6	3.6	4.68
50	60	PIPAW050N	51.8	4.1	6.65
65	75.7	PIPAW065N	67.5	4.1	8.0
75	88.7	PIPAW080N	77.7	5.5	13.05
100	114	PIPAW100N	100.8	6.6	20.2
125	139.2	PIPAW125N	125.2	7.0	30.0
150	165	PIPAW150N	147.2	8.9	39.7
200	216	PIPAW200N	195.4	10.3	67.0
250	267	PIPAW250N	241.6	12.7	100.1
300	318	PIPAW300N	287.8	15.1	144.0