


DIAMOND CUTTING DISC

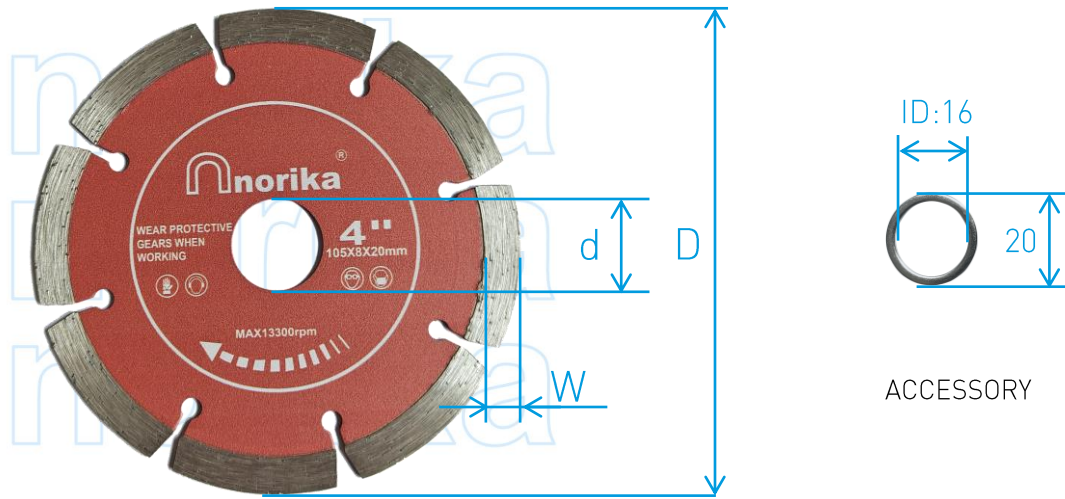

ACCESSORY

APPLICATION: Special designed for cutting all kinds of stone, concrete, tile, brick or other building material, used on hand held power tools.

NOTICE:

- Use a proper flange that fits the saw blade diameter, the tolerance of the fitness between the arbor and the bore hole must be 0.1mm or less.
- Mount the saw blade in same rotating direction with the tools arbor. When operating the tools, do not side forcing or curve cutting. Stop working at once when the saw blade broken.
- When dry cutting. Do not keep working continually to avoid reducing the saw blade cutting performance or lifespan. When wet cutting, be careful of the electrical leakage.
- Specialist's suggestion: before using a new saw blade, let it rotate without load to check for any wobbling or run-out, then make initial cuts on abrasive material such as clay paving or blocks for a few seconds to ascertain its optimal working condition. If over time, the saw loses its sharpness, repeat the process by cutting the abrasive material once more.
- Do not remove the safety guard of the tools when operating, and always wear protective gears like glove, goggle, shoes, earplug, respirator etc.

STANDARD SPECIFICATIONS

SKU	SPEED	D (mm)	d (mm)	W (mm)	WEIGHT (kg)	PCS/CTN
DWDN100	13300 rpm	105	105	20	0.083	300