



PEX PRESS-FIT FITTINGS (U PROFILE)



COMPLY WITH BS EN ISO 21003-1:2008
 BS EN ISO 21003-3:2008
 BS EN ISO 21003-5:2008
 BS EN 12165:2016
 AS/NZS 4020:2005
 SS 375:2015



F5 DEMOUNTABLE FEMALE STRAIGHT UNION

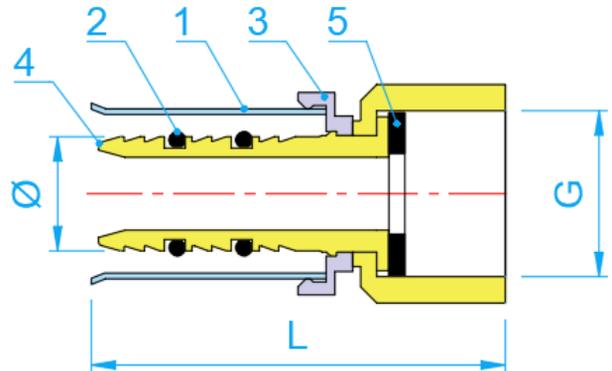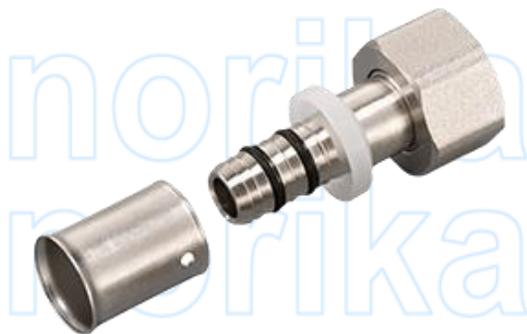

SIDE VIEW

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Sleeve	AISI304
2	O Ring	EPDM
3	Plastic Gasket	PE
4	Body	DZR Brass (Nickel Plated)
5	Washer	EPDM

DIMENSIONS

SKU	SIZE (mm x inch)	Ø (mm)	G BSP (inch)	L (mm)	WEIGHT (kg)	PCS/CTN
PEXF5FJC016*	16 × 1/2"	11.8	1/2"	51.0	0.060	384
PEXF5FJC01620*	16 × 3/4"	15.8	1/2"	52.0	0.077	200
PEXF5FJC02016*	16 × 1/2"	15.8	1/2"	52.0	0.067	240
PEXF5FJC020*	20 × 3/4"	15.8	3/4"	52.5	0.089	192
PEXF5FJC02520*	25 × 3/4"	19.8	3/4"	58.5	0.111	144
PEXF5FJC025*	25 × 1"	19.8	1"	61.0	0.156	96
PEXF5FJC03225*	32 × 1"	25.8	1"	61.0	0.172	96
PEXF5FJC032*	32 × 1 1/4"	25.8	1 1/4"	62.5	-	-
PEXF5FJC04032*	40 × 1 1/4"	31.8	1 1/4"	78.0	-	-
PEXF5FJC05040*	50 × 1 1/2"	40.8	1 1/2"	83.5	-	-

*This item requires special ordering. Please consult with a salesperson for the estimated lead time.