

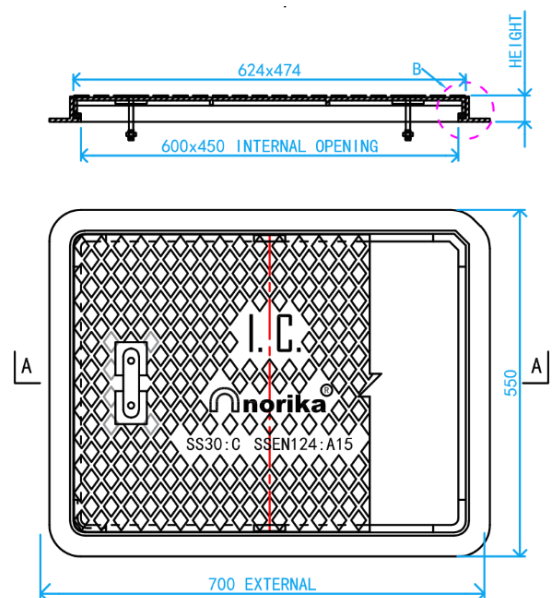


Type of Weight (Symbol)	SS EN 124-2	Design Load	Place of Installation	SS30 Grade	Design Load
	A15	30KN	In areas imposing particularly high wheel loads, eg. aircraft pavements.	C	30KN
	B125	125KN	In areas, generally not on public road imposing high wheel loads, e.g. docks, aircraft pavements.	B	125KN
	C250	250KN	In carriageways of expressways, arterial, industrial roads and parking areas for all types of road vehicles.	A2	230KN
	D400	400KN	In carriageways not exceeding 0.5m away from kerb side channels of all roads and in carriageways of minor residential roads.	A1	400KN
	E600	600KN	On footways where it is possible for a vehicle to mount or occasionally open to light vehicle to use and car parking decks.	AA2	600KN
	F900	900KN	In precincts which are inaccessible to motor vehicles.	AA1	900KN


Light Duty Cover & Frame




SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIICCS	C	Ductile Iron	600x450	706x556	40	"T" Or "U" Handle





INSTALLATION EFFECT

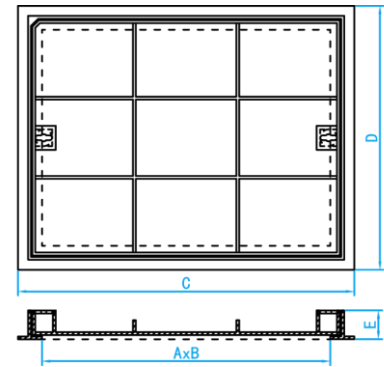



SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIRICC	C	Ductile Iron	600x450	700x550	60	Recessed

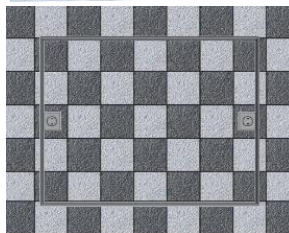

INSTALLATION EFFECT

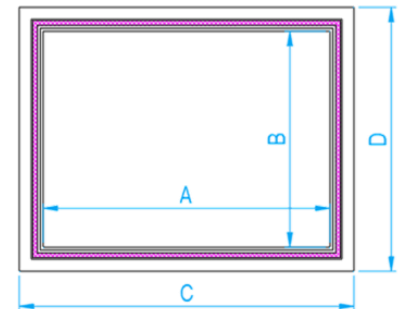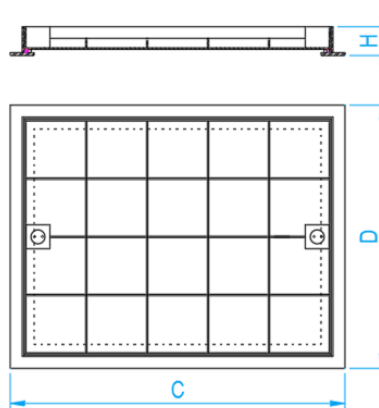


SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
SSRICC	C	AISI304	600x450	700x550	64.5	Recessed
SSRICC316L	C	AISI316L	600x450	700x550	64.5	Recessed

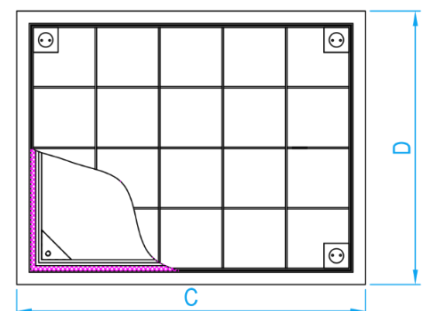


SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
SSRICCAT	C	AISI304	600x450	700x550	64.5	Recessed & Air-Water Tight
SSRICCAT316L	C	AISI316L	600x450	700x550	64.5	


Medium Duty Cover & Frame

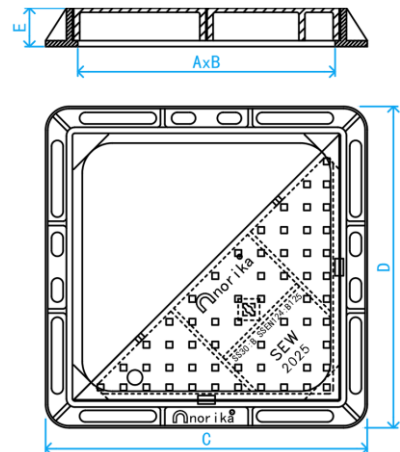

SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
DIMDMC/ DIMDMCSEW	B	Ductile Iron	600x600	750x750	75	Medium Duty Without/ With "SEW" Label




INSTALLATION EFFECT

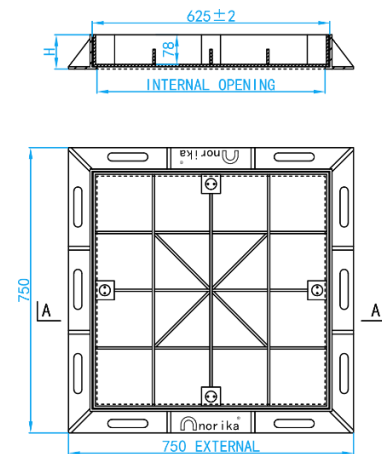

SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
SSMDRMC	B	AISI304	600x600	750x750	90	Recessed
SSMDRMC316L	B	AISI316L	600x600	750x750	90	Recessed




INSTALLATION EFFECT

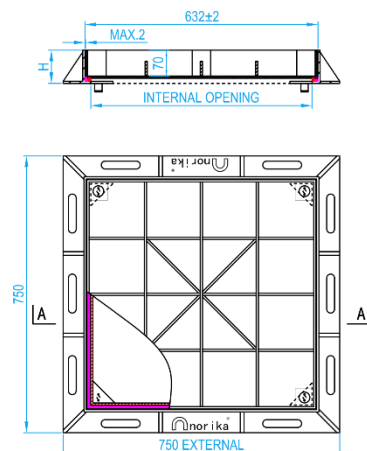


SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
SSMDRMCAT	B	AISI304	600 x 600	800 x 800	90	Recessed & Air-Water Tight
SSMDRMCAT316L	B	AISI316L	600 x 600	800 x 800	90	



U HANDLE





T HANDLE

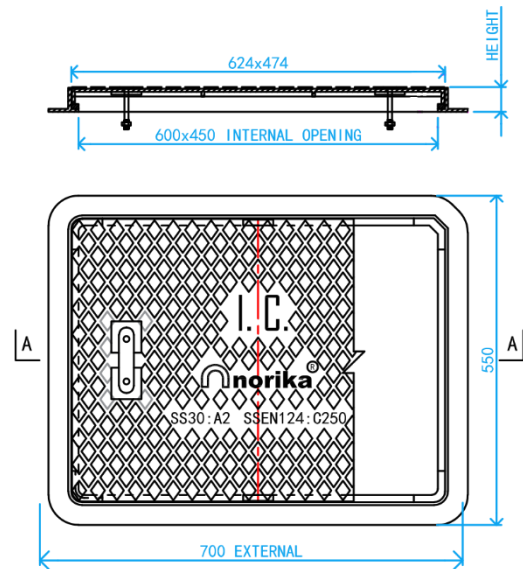

SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIICCS-A2	A2	Ductile Iron	600x450	700x550	75	"T" Or "U" Handle


SKU: DIHDMC
DIHDMCSEW

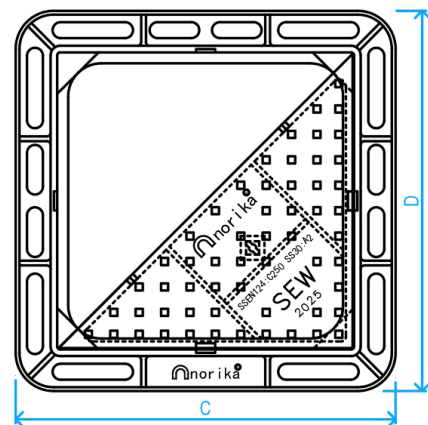
SKU: DIMDMC-C250
DIMDMCSEW-C250SEW


SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIHDMC/ DIHDMCSEW	A2	Ductile Iron	600x600	800x800	140	Heavy Duty Without/ With "SEW" Label
DIMDMC-C250/ DIMDMC-C250SEW	A2	Ductile Iron	600x600	750x750	90	Medium Duty Without/ With "SEW" Label


Recessed/Mosaic Manhole Cover & Frame




DIMDRMCA2



INSTALLATION EFFECT

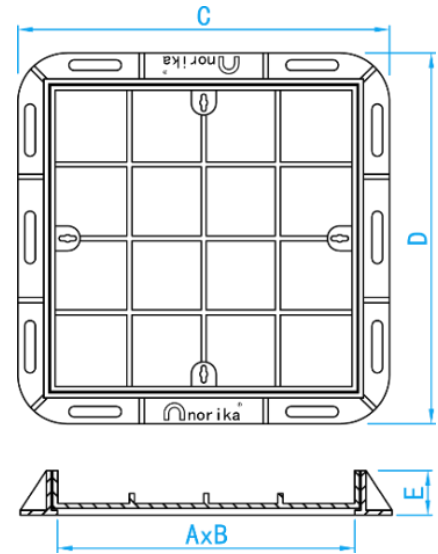

DIHDRMC




INSTALLATION EFFECT


SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIMDRMCA2	A2	Ductile Iron	600x600	750x750	90	Medium Duty
DIHDRMC	A2	Ductile Iron	600x600	800x800	140	Heavy Duty



SSHDRMC




INSTALLATION EFFECT

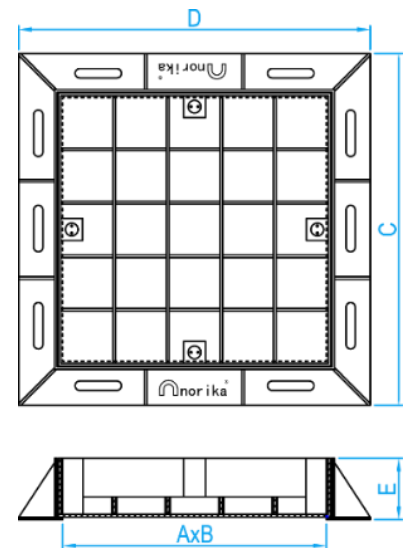


SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
SSHDRMC-A1	A1	AISI304	600x600	800x800	140	Heavy Duty
SSHDRMC316L-A1	A1	AISI316L	600x600	800x800	140	Heavy Duty



SSHDT-C-A1




INSTALLATION EFFECT

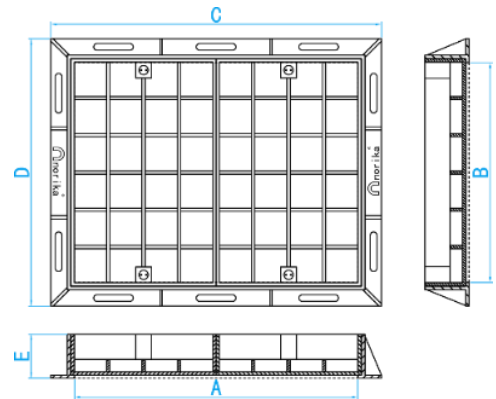


SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
SSHDT-C-A1	A1	AISI304	900x700	1050x850	140	Heavy Duty
SSHDT-C-A1316	A1	AISI316L	900x700	1050x850	140	Heavy Duty



DIHDMC-D400




INSTALLATION EFFECT

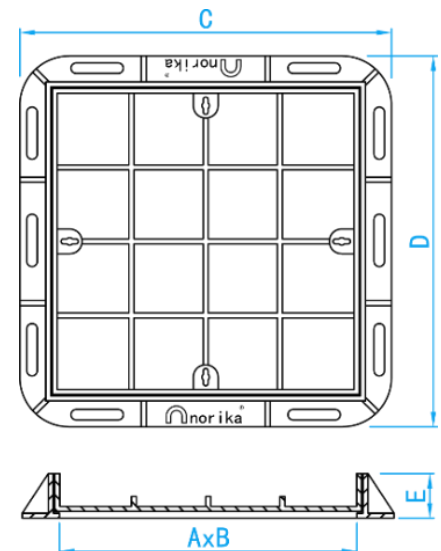


SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIHDMC-D400	A1	Ductile Iron	600x600	800x800	140	Heavy Duty

Circular Manhole Cover & Square Frame

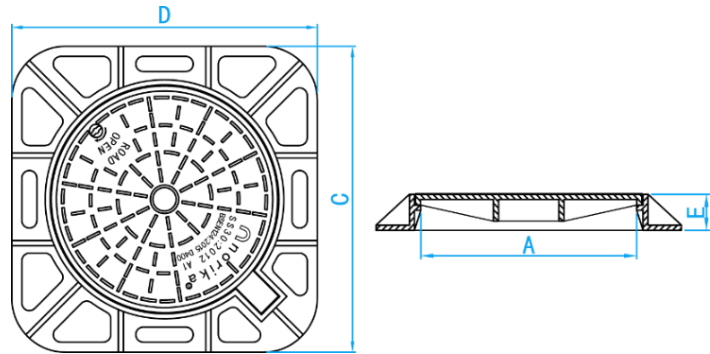


SKU	GRADE	MATERIAL	INTERNAL OPENING (A mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIMC	A1	Ductile Iron	Ø600	850x850	100	-

Heavy Duty Manhole Cover & Frame



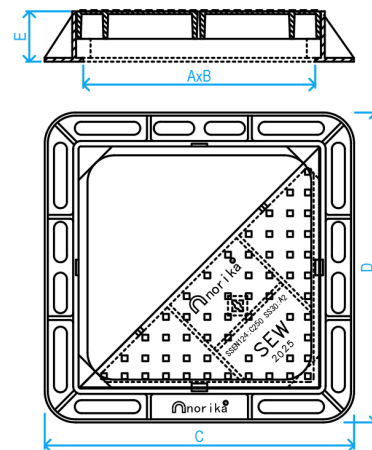


SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIHDMC-D400/ DIHDMC-D400SEW	A1	Ductile Iron	600x600	800x800	140	Heavy Duty/ Medium Duty With "SEW" Label

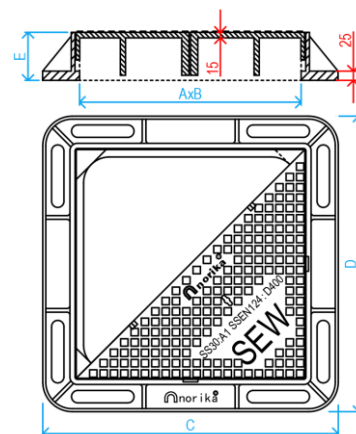




SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIHDMC-A1 DIHDMC-A1SEW	A1	Ductile Iron	600x600	800x800	140	Heavy Duty/ Heavy Duty With "SEW" Label

Air-Water Tight/ Recessed-Mosaic Manhole Cover & Frame




INSTALLATION EFFECT

SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIMCATRD400-0600	A1	Ductile Iron	600x600	882x882	120	Air / Water Tight
DIMCATRD400-0800	A1	Ductile Iron	800 x 800	1082 x 1082	120	Air / Water Tight
DIMCATRD400-1000	A1	Ductile Iron	1000 x 1000	1282 x 1282	120	Air / Water Tight

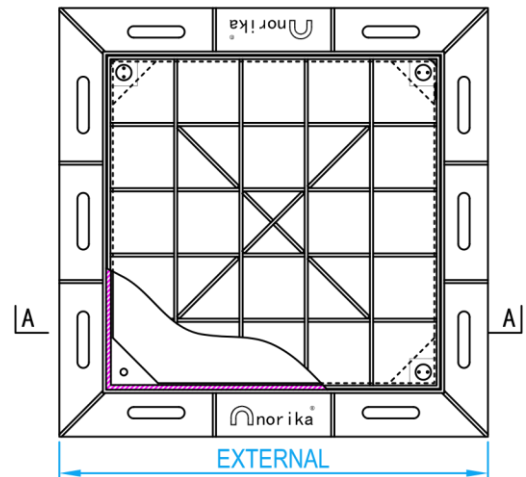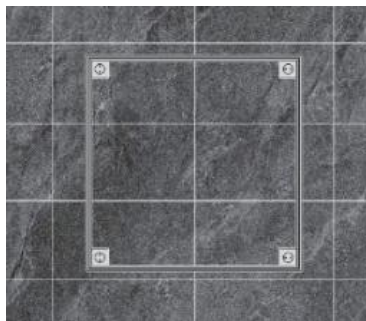

INSTALLATION EFFECT

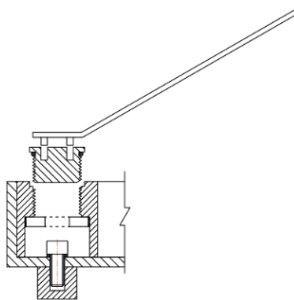

KEY HOLE





Note: 4 bolts and rubber seal to ensure airtight and watertight.



Norika designed keyhole system

SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
SSHDRMCAT-A1	A1	AISI304	600 x 600	800 x 800	140	Air-Water Tight
SSHDRMCAT316L-A1	A1	AISI316L	600 x 600	800 x 800	140	Air-Water Tight

Air/Water Tight Manhole Cover & Frame

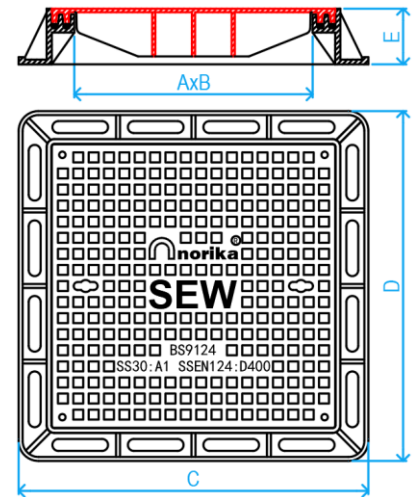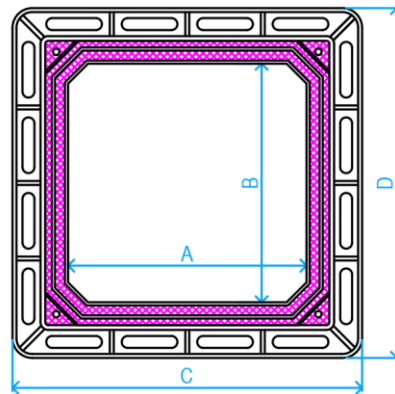

SKU	GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIMCATD400-0600	A1	Ductile Iron	600x600	890x890	140	Air-Water Tight/ Air-Water Tight With "PWCS" Label
DIMCATD400-0800	A1	Ductile Iron	800x800	1080x1090	140	
DIMCATD400-09100610	A1	Ductile Iron	910x610	1200x900	100	
DIMCATD400-1000	A1	Ductile Iron	1000x1000	1280x1280	100	
DIMCATD400-1200	A1	Ductile Iron	1200x1200	1520x1520	100	
DIMCATD400-12001000	A1	Ductile Iron	1200x1000	1520x1320	100	

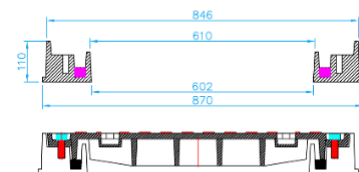

SKU	GRADE	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (mm)	Remarks/Optional
DIMCATD400-R0600	A1	Ductile Iron	Ø600	Ø870	110	Air-Water Tight
DIMCATD400-R1000	A1	Ductile Iron	Ø1000	Ø1320	100	Air-Water Tight