CAST IRON HUBLESS PIPE REDUCER & END CAPS

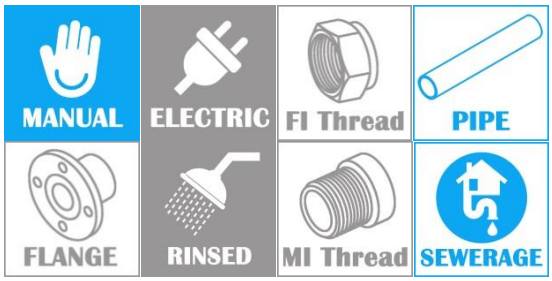

COMPLY WITH CISPI 301-12

COATING CHARACTERISTIC

Fittings:

Inside and outside: Anti-corrosive paint.

Coating Thickness: Internal wall min 40μm, outer wall min 40μm.

REDUCER

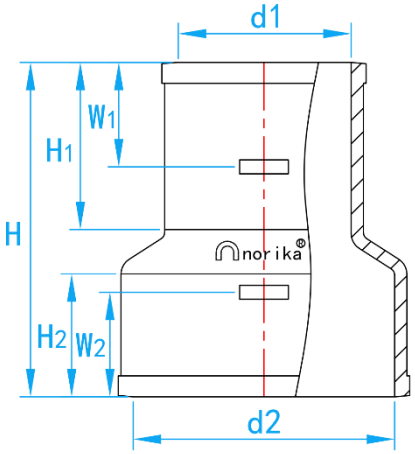

FRONT SECTIONAL VIEW

DIMENSIONS

SKU	SIZE (mm)	d1 (mm)	d2 (mm)	H1 (mm)	H2 (mm)	H (mm)	W1 (mm)	W2 (mm)	WEIGHT (kg)
HUBRS08050	80 X 50	50.80	76.21	42	42	90	30	30	0.68
HUBRS10050	100 X 50	50.80	101.6	42	42	90	30	30	1.00
HUBRS10080	100 X 80	76.21	101.6	42	42	90	30	30	1.05
HUBRS15050	150 X 50	50.80	150.88	42	50	100	30	42	1.70
HUBRS15080	150 X 80	76.21	150.88	42	50	100	30	42	1.82
HUBRS150100	150 X 100	101.6	150.88	42	50	100	30	42	2.09
HUBRS20080	200 X 80	76.21	201.68	42	50	114	30	42	3.50
HUBRS200100	200 X 100	101.6	201.68	49.6	58.5	123.2	38.5	46.6	3.64
HUBRS200150	200 X 150	150.88	201.68	50	59.9	124.1	39	47	3.86
HUBRS250100	250 X 100	101.6	254.00	38	76	140	29	51	6.36
HUBRS250150	250 X 150	150.88	254.00	51	76	152	38	51	6.60
HUBRS250200	250 X 200	201.68	254.00	51	76	152	51	51	6.81

END CAPS

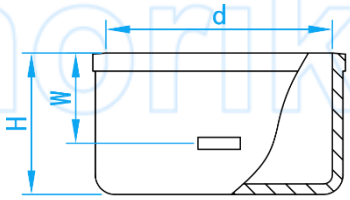

FRONT SECTIONAL VIEW

DIMENSIONS

SKU	SIZE (mm)	d (mm)	H (mm)	W (mm)	WEIGHT (kg)
HUBEC050	50	50.80	45	30	0.32
HUBEC080	75	76.21	45	30	0.50
HUBEC100	100	101.6	45	30	0.98
HUBEC150	150	150.88	45	42	1.82
HUBEC200	200	201.68	57.2	51.7	3.05
HUBEC250	250	254.00	76	51.8	4.09

Copyright. All Rights Reserve. Norika®
Norika is constantly seeking product improvements. Therefore, its products are subject to change if deemed necessary.