




STAINLESS STEEL 304 PIPE

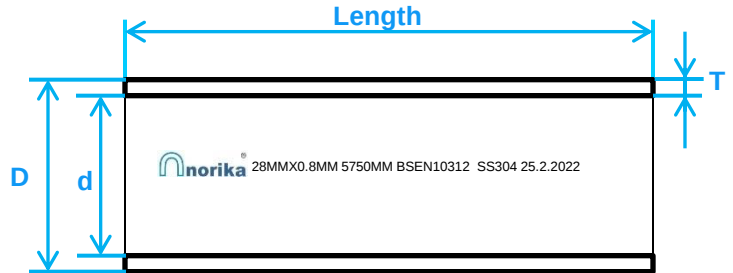


COMPLY WITH BSEN10312:2002

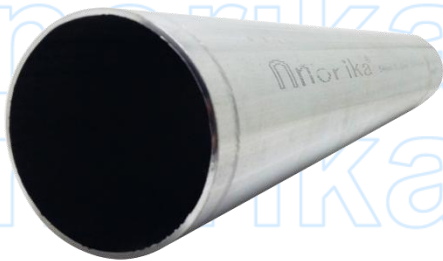


CROSS SECTION VIEW

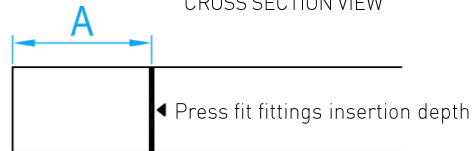

PIPE END SIDE VIEW



2.9M PIPE SIDE VIEW

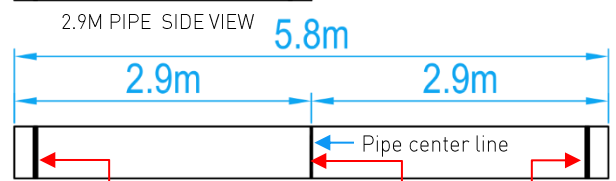

5.8M PIPE SIDE VIEW

Designed By Norika®

STANDARD SPECIFICATIONS

Working Pressure	25 Bar
	362 PSI
Standard Length	5.8 meters
Material	Stainless steel 304
Melting point	1400-1450°C (2552-2642°F)
Surface Finish	Bright Annealed

DIMENSIONS

SKU	DN	D (mm)	d (mm)	T (mm)	Insertion Depth A (mm)	L (mm)	WEIGHT (kg)
PIPSS015	15	15.06-15.15	13.8	0.6	20	5800	1.248
PIPSS020	22	22.07-22.18	20.6	0.7	21	5800	2.213
PIPSS025	28	28.07-28.18	26.4	0.8	22	5800	2.837
PIPSS035	35	35.09-35.23	33.0	1.0	26	5800	4.530
PIPSS042	42	42.09-42.23	39.8	1.1	30	5800	6.787
PIPSS050	54	54.09-54.23	51.6	1.2	35	5800	8.781
PIPSS065	67	66.80-67.03	64.6	1.2	50	5800	11.27
PIPSS080	76	76.20-76.43	73.0	1.5	51	5800	16.60
PIPSS100	108	108.10-108.33	105.0	1.5	75	5800	23.80

NOTE:

1. Wall thickness tolerance standard is $\pm 10\%$.
2. The 5.8m length pipes comes with a pre-cut length of 2.9m (as shown above).